



Body material:

Aluminium profile

Colour:

Standard Gray 9006, other RAL colours on request (please add RAL code after index number)

LED module:

Philips / Osram or Tridonic LED module included

Colour temperature:

3000K or 4000K

Colour Rendering Index (CRI)

>80 in standard, other on request

Driver:

Electronic driver in standard, DALI on request

Emergency unit:

on request - Standard or DALI3 hour emergency unit

Movement sensor:

on request

Daylight control sensor:

on request

Operating temperature range:

0°C ... +40°C

IP Class:

IP20 in standard, IP44 on request

Power:

220-240V 50/60Hz

Lighting direction:

Direct index nr. 6248.XXXX or Direct / indirect - index nr. 6248.UD.XXXX

Reflector type:

Aluminium white

Light distribution:

Symmetric

Diffuser:

White acrylic diffuser [WD] in standard, acrylic frosted [AC] microprismatic [MPR] or any other on request.

General data:

5 Years standard warranty

UGR<19 diffuser on request
Luminaires can be connected into long lighting lines


Different lumen output or wattage available on request

All other technical features such as: Luminare Efficacy, LOR, Lumen maintenance L/B etc. available in our pricelist

Wattage of products may vary due to constant LED efficacy improvements. Luminous flux & Luminare Power tolerance +/- 10%.

System power consumption (LED module & driver) depends on components used

Colour temp. [K]	CRI	Lifetime [H]	Warranty [Years]	MacAdam [SDCM]	Length [mm]	Weight [kg]
3000	Ra > 80	50.000	5	3	868	2,00
4000	Ra > 80	50.000	5	3	868	2,00
3000	Ra > 80	50.000	5	3	1149	2,50
4000	Ra > 80	50.000	5	3	1149	2,50
3000	Ra > 80	50.000	5	3	1430	3,00
4000	Ra > 80	50.000	5	3	1430	3,00
3000	Ra > 80	50.000	5	3	1149	3,00
4000	Ra > 80	50.000	5	3	1149	3,00
3000	Ra > 80	50.000	5	3	1430	3,50
4000	Ra > 80	50.000	5	3	1430	3,50



Accessories



6247.15



6564.15

Index no.	Steel wire suspension
6247.15	single 1,5 m long suspension set for PROFI luminaire - 2 pcs. Per luminaire needed.
6564.15	1,5 m long transparent power cable with ceiling base and terminal block

UP/DN version



[WD] diffuser



[AC] diffuser



[MPR] diffuser







Body material: Aluminium profile
Colour: Standard Gray 9006, other RAL colours on request (please add RAL code after index number)
LED module: Philips / Osram or Tridonic LED module included
Colour temperature: 3000K or 4000K
Colour Rendering Index (CRI): >80 in standard, other on request
Driver: Electronic driver in standard, DALI on request
Emergency unit: on request - Standard or DALI3 hour emergency unit
Movement sensor: on request
Daylight control sensor: on request
Operating temperature range: 0°C ... +40°C
IP Class: IP20 in standard, IP44 on request
Power: 220-240V 50/60Hz
Lighting direction: Direct
Reflector type: Aluminium white
Light distribution: Symmetric
Diffuser: White acrylic diffuser [WD] in standard, acrylic frosted [AC], microprismatic [MPR] or any other on request.
General data: 5 Years standard warranty



Colour temp. [K]	CRI	Lifetime [h]	Warranty [Years]	MacAdam [SDCM]	Length [mm]	Weight [kg]
3000	Ra > 80	50.000	5	3	587	1,50
4000	Ra > 80	50.000	5	3	587	1,50
3000	Ra > 80	50.000	5	3	868	2,00
4000	Ra > 80	50.000	5	3	868	2,00
3000	Ra > 80	50.000	5	3	1149	2,50
4000	Ra > 80	50.000	5	3	1149	2,50
3000	Ra > 80	50.000	5	3	1430	3,50
4000	Ra > 80	50.000	5	3	1430	3,50



Accessories



6247.15



6564.15

Index no.	Steel wire suspension
6247.15	single 1,5 m long suspension set for PROFI luminaire - 2 pcs. Per luminaire needed.
6564.15	1,5 m long transparent power cable with ceiling base and terminal block


[WD] diffuser




[AC] diffuser



[MPR] diffuser



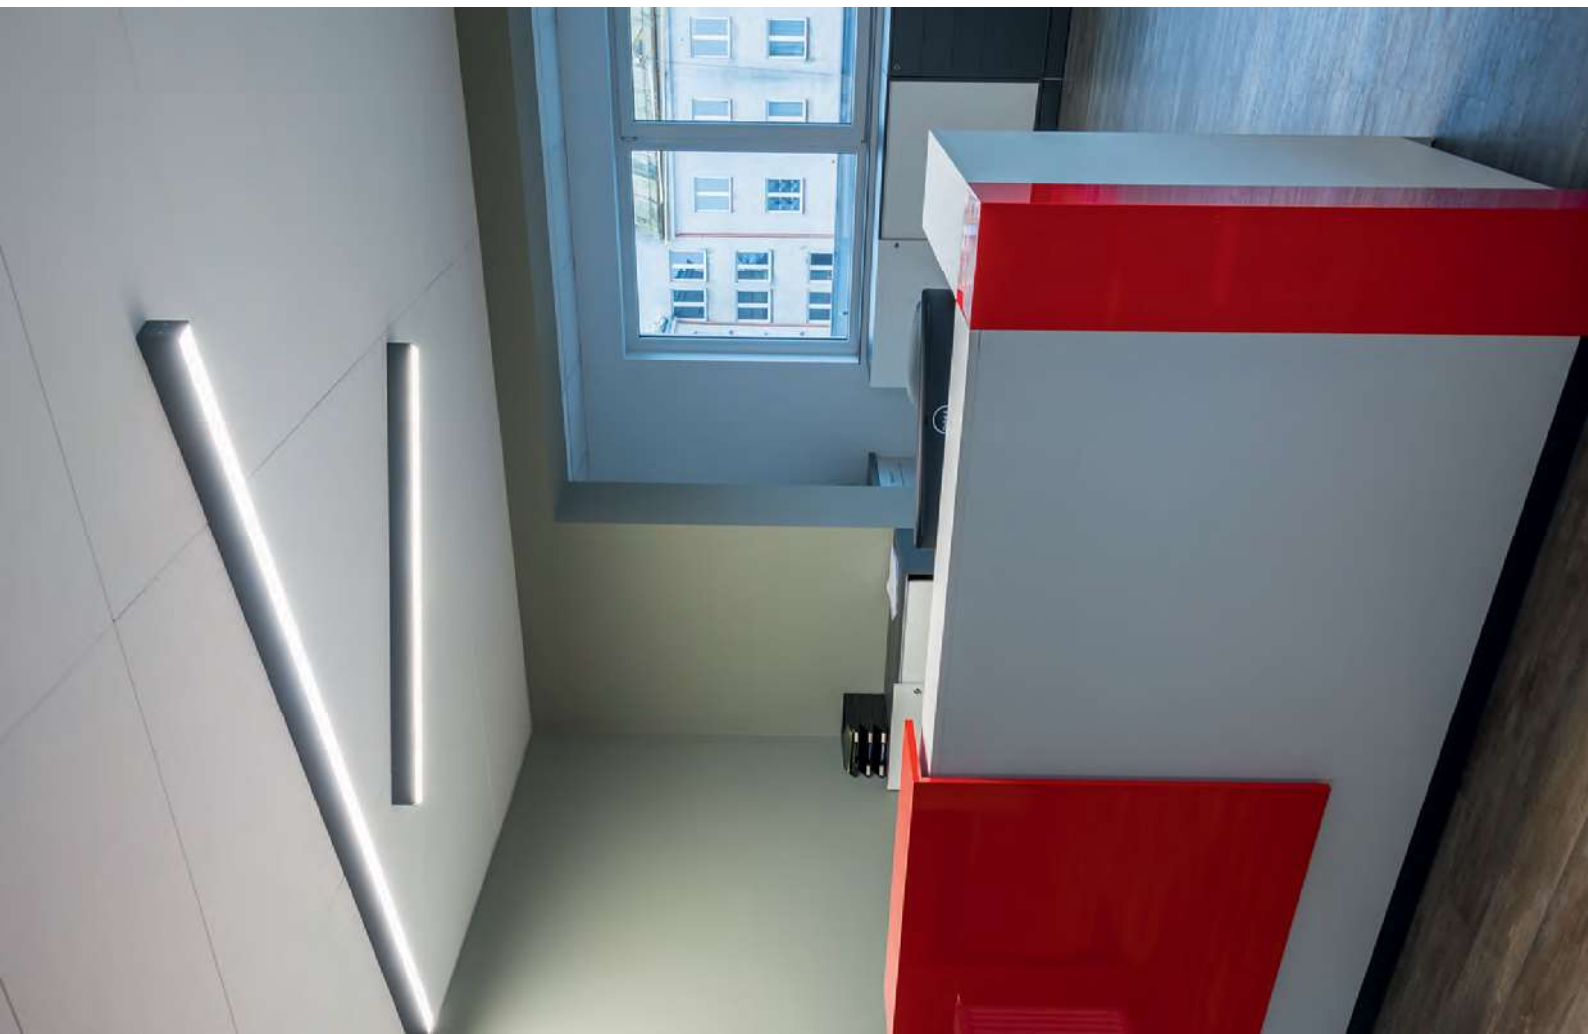

Colour:

Colours on request (please add RAL code after index number.)

LED module:

Philips / Osram or Tridonic LED module included

Colour temperature:

3000K or 4000K

Colour Rendering Index (CRI)

>80 in standard, other on request

Driver:

Electronic driver in standard, DALI on request

Emergency unit:

on request - Standard or DALI3 hour emergency unit

Movement sensor:

on request

Daylight control sensor:

on request

Operating temperature range:

0°C... +40°C

IP Class:

IP20 in standard, IP44 on request

Power:

220-240V 50/60Hz

Lighting direction:

Direct

Reflector type:

Aluminium white

Light distribution:

Symmetric

Diffuser:

White acrylic diffuser (WD) in standard, acrylic frosted (AC), microprismatic (MPR) or any other on request.

General data:

5 Years standard warranty

UCR<19 diffuser on request

Luminaires can be connected into long lighting lines

Different lumen output or wattage available on request

All other technical features such as: Luminaire Efficacy, LOR, Lumen maintenance L/B etc. available in our pricelist

Wattage of products may vary due to constant LED efficacy improvements. Luminous flux & Luminaire Power tolerance +/- 10%.

System power consumption (LED module & driver) depends on components used




Colour temp. [K]	CRI	Lifetime [h]	Warranty [Years]	MacAdam [SDCM]	Length [mm]	Weight [kg]
3000	Ra > 80	50.000	5	3	601	1,50
4000	Ra > 80	50.000	5	3	601	1,50
3000	Ra > 80	50.000	5	3	882	2,00
4000	Ra > 80	50.000	5	3	882	2,00
3000	Ra > 80	50.000	5	3	1163	2,50
4000	Ra > 80	50.000	5	3	1163	2,50
3000	Ra > 80	50.000	5	3	1444	3,50
4000	Ra > 80	50.000	5	3	1444	3,50

[AC] diffuser

[MPR] diffuser



- L - 590 x 52
- L - 870 x 52
- L - 1150 x 52
- L - 1430 x 52



48



M.C. Burtel
Directie Speciale, Algemeen en Administratief
1998-2018





Body material: Aluminium profile

Colour: Standard Gray 9006, other RAL colours on request (please add RAL code after index number)

LED module: Philips / Osram or Tridonic LED module included

Colour temperature: 3000K or 4000K

Colour Rendering Index (CRI) >80 in standard, other on request

Driver: Electronic driver in standard, DALI on request

Emergency unit: on request - Standard or DALI3 hour emergency unit on request

Movement sensor: N/A

Daylight control sensor: 0°C ... +40°C

Operating temperature range: IP20 in standard, IP44 on request

IP Class: 220-240V 50/60Hz

Power: Direct

Lighting direction: Aluminium white

Reflector type: Symmetric

Light distribution: White cubical diffuser


Diffuser: 5 Years standard warranty

General data: Different lumen output or wattage available on request

All other technical features such as: Luminaire Efficacy, LOR, Lumen maintenance L/B etc. available in our pricelist

Wattage of products may vary due to constant LED efficacy improvements. Luminous flux & Luminaire Power tolerance +/-10%.


System power consumption (LED module & driver) depends on components used



Colour temp. [K]	CRI	Lifetime [H]	Warranty [Years]	MacAdam [SDCM]	Length [mm]	Weight [kg]
3000	Ra > 80	50.000	5	3	587	1,50
4000	Ra > 80	50.000	5	3	587	1,50
3000	Ra > 80	50.000	5	3	868	2,00
4000	Ra > 80	50.000	5	3	868	2,00
3000	Ra > 80	50.000	5	3	1149	2,50
4000	Ra > 80	50.000	5	3	1149	2,50
3000	Ra > 80	50.000	5	3	1430	3,50
4000	Ra > 80	50.000	5	3	1430	3,50



Index no.	Lumen output [lm]	Power [W]	Colour temp. [K]	CRI	Lifetime [H]	Warranty [Years]	MacAdam [SDCM]	Length [mm]	Weight [kg]
6592.2200.830	2200	15	3000	Ra > 80	50.000	5	3	601	1,50
6592.2200.840	2200	15	4000	Ra > 80	50.000	5	3	601	1,50
6592.3300.830	3300	23	3000	Ra > 80	50.000	5	3	882	2,00
6592.3300.840	3300	23	4000	Ra > 80	50.000	5	3	882	2,00
6592.4400.830	4400	29	3000	Ra > 80	50.000	5	3	1163	2,50
6592.4400.840	4400	29	4000	Ra > 80	50.000	5	3	1163	2,50
6592.5500.830	5500	36	3000	Ra > 80	50.000	5	3	1444	3,50
6592.5500.840	5500	36	4000	Ra > 80	50.000	5	3	1444	3,50





Body material: Aluminium profile

Colour: Standard Gray 9006, other RAL colours on request (please add RAL code after index number)

LED module: Philips MASTER LEDtube retrofit LED lamp

Colour temperature: 3000K, 4000K or 6500K

Colour Rendering Index (CRI) >80 in standard

Driver: N/A

Emergency unit: N/A

Movement sensor: N/A

Daylight control sensor: N/A

Operating temperature range: 0°C ... +40°C

IP Class: IP20 in standard, IP44 on request

Power: 220-240V 50/60Hz

Lighting direction: Direct

Light distribution: Symmetric

Diffuser: White acrylic diffuser [WD] in standard, acrylic frosted [AC], microprismatic [MPR] or any other on request.

General data: 5 Years standard warranty

Luminaires can be connected into long lighting lines

All other technical features such as: Luminaire Efficacy, LOR, Luminaire maintenance L/B etc. available in our pricelist


Wattage of products may vary due to constant LED efficacy improvements. Luminous flux & Luminaire Power tolerance +/- 10%.

System power consumption (LED module & driver) depends on components used



Colour temp. [K]	CRI	Lifetime [h]	Warranty [Years]	MacAdam [SDCM]	Length [mm]	Weight [kg]
3000	Ra > 80	50.000	5	4	1250	2,50
4000	Ra > 80	50.000	5	4	1250	2,50
6500	Ra > 80	50.000	5	4	1250	2,50
3000	Ra > 80	50.000	5	4	1550	3,50
4000	Ra > 80	50.000	5	4	1550	3,50
6500	Ra > 80	50.000	5	4	1550	3,50

Accessories




6247.15



6564.15

[AC] diffuser

[MPR] diffuser





Colour: (please add RAL code after index number)

Colour:

LED module:
Philips MASTER LEDtube retrofit LED lamp

Colour temperature:
3000K, 4000K or 6500K

Colour Rendering Index (CRI)
>80 in standard

Driver:
N/A

Emergency unit:
N/A

Movement sensor:
N/A

Daylight control sensor:
N/A

Operating temperature range:
0°C ... +40°C

IP Class:
IP20 in standard, IP44 on request

Power:
220-240V/50/60Hz

Lighting direction:
Direct

Light distribution:
Symmetric

Diffuser:
White acrylic diffuser (WD) in standard, acrylic frosted (AC), microprismatic (MPR) or any other on request.

General data:
3 Years standard warranty
Luminaires can be connected into long lighting lines
All other technical features such as: Luminaire Efficacy, LOR, Lumen maintenance L70 etc. available in our pricelist
Wattage of products may vary due to constant LED efficacy improvements. Luminous flux & Luminaire Power tolerance +/- 10%.
System power consumption (LED module & driver) depends on components used





Colour temp. [K]	CRI	Lifetime [h]	Warranty [Years]	MacAdam [SDCM]	Length [mm]	Weight [kg]
3000	Ra > 80	50.000	5	4	1270	2,50
4000	Ra > 80	50.000	5	4	1270	2,50
6500	Ra > 80	50.000	5	4	1270	2,50
3000	Ra > 80	50.000	5	4	1570	3,50
4000	Ra > 80	50.000	5	4	1570	3,50
6500	Ra > 80	50.000	5	4	1570	3,50

[MPR] diffuser

[AC] diffuser



L - 1250 x 64
L - 1550 x 64







Body material:

Aluminium profile

Colour:

Standard Gray 9006, other RAL colours on request (please add RAL code after index number)

LED module:

Philips / Osram or Tridonic LED module included

Colour temperature:

3000K or 4000K

Colour Rendering Index (CRI)

>80 in standard, other on request

Driver:

Electronic driver in standard, DALI on request

Emergency unit:

on request - Standard or DALI3 hour emergency unit

Movement sensor:

on request

Daylight control sensor:

on request

Operating temperature range:

0°C ... +40°C

IP Class:

IP20 in standard, IP44 on request

Power:

220-240V 50/60Hz

Lighting direction:

Direct index nr. 3499.XXXX or Direct / indirect - index nr. 3499.UD.XXXX

Reflector type:

Aluminium white

Light distribution:

Symmetric

Diffuser:

White acrylic diffuser [WD] in standard, acrylic frosted [AC], microprismatic [MPR] or any other on request.

General data:

5 Years standard warranty

UGR<19 diffuser on request
Luminaires can be connected into long lighting lines

Different lumen output or wattage available on request



All other technical features such as: Luminaire Efficacy, LOR, Lumen maintenance /B etc. available in our pricelist

Wattage of products may vary due to constant LED efficacy improvements. Luminous flux & Luminaire Power tolerance +/- 10%.

System power consumption (LED module & driver) depends on components used

Colour temp. [K]	CRI	Lifetime [H]	Warranty [Years]	MacAdam [SDCM]	Length [mm]	Weight [kg]
3000	Ra > 80	50.000	5	3	587	1,50
4000	Ra > 80	50.000	5	3	587	1,50
3000	Ra > 80	50.000	5	3	868	2,00
4000	Ra > 80	50.000	5	3	868	2,00
3000	Ra > 80	50.000	5	3	1149	2,50
4000	Ra > 80	50.000	5	3	1149	2,50
3000	Ra > 80	50.000	5	3	1430	3,50
4000	Ra > 80	50.000	5	3	1430	3,50
3000	Ra > 80	50.000	5	3	1149	2,50
4000	Ra > 80	50.000	5	3	1149	2,50
3000	Ra > 80	50.000	5	3	1430	3,50
4000	Ra > 80	50.000	5	3	1430	3,50

3000	Ra > 80	50.000	5	3	1149	2,50
4000	Ra > 80	50.000	5	3	1149	2,50
3000	Ra > 80	50.000	5	3	1430	3,50



Accessories



6247.15



6564.15

Index no.

Steel wire suspension

6247.15 single 1,5 m long suspension set for PROFIL luminaire - 2 pcs. Per luminaire needed.

6564.15 1,5 m long transparent power cable with ceiling base and terminal block



UP/DN version



[WD] diffuser



[AC] diffuser



[MPR] diffuser





Colour:

Options on request (please add RAL code after index number)

LED module:

Colour temperature:

Colour Rendering Index (CRI)

Driver:

Emergency unit:

Movement sensor:

Daylight control sensor:

Operating temperature range:

IP Class:

Power:

Lighting direction:

Reflector type:

Light distribution:

Diffuser:

General data:

Philips / Osram or Tridonic LED module included
3000K or 4000K
>80 in standard, other on request
Electronic driver in standard, DALI on request
on request - Standard or DALI3 hour emergency unit
on request
on request

0°C... +40°C
IP20 in standard, IP44 on request
220-240V 50/60Hz
Direct
Aluminium white
Symmetric

White acrylic diffuser (WD) in standard, acrylic frosted (AC), microprismatic (MPR) or any other on request.
5 Years standard warranty
UCR<19 diffuser on request

Luminaires can be connected into long lighting lines
Different lumen output or wattage available on request
All other technical features such as: Luminaire Efficacy, LOR, Lumen maintenance L/B etc. available in our pricelist

Wattage of products may vary due to constant LED efficacy improvements. Luminous flux & Luminaire Power tolerance +/- 10%.
System power consumption (LED module & driver) depends on components used

Wattage of products may vary due to constant LED efficacy improvements. Luminous flux & Luminaire Power tolerance +/- 10%.
System power consumption (LED module & driver) depends on components used

System power consumption (LED module & driver) depends on components used





Colour temp. [K]	CRI	Lifetime [h]	Warranty [Years]	MacAdam [SDCM]	Length [mm]	Weight [kg]
3000	Ra > 80	50.000	5	3	601	1,50
4000	Ra > 80	50.000	5	3	601	1,50
3000	Ra > 80	50.000	5	3	882	2,00
4000	Ra > 80	50.000	5	3	882	2,00
3000	Ra > 80	50.000	5	3	1163	2,50
4000	Ra > 80	50.000	5	3	1163	2,50
3000	Ra > 80	50.000	5	3	1444	3,50
4000	Ra > 80	50.000	5	3	1444	3,50
3000	Ra > 80	50.000	5	3	1163	2,50
4000	Ra > 80	50.000	5	3	1163	2,50
3000	Ra > 80	50.000	5	3	1444	3,50
4000	Ra > 80	50.000	5	3	1444	3,50

[AC] diffuser

[MPR] diffuser



- L - 590 x 64
- L - 870 x 64
- L - 1150 x 64
- L - 1430 x 64









Body material:

Aluminium profile

Colour:

Standard Gray 9006, other RAL colours on request (please add RAL code after index number)

LED module:

Philips / Osram or Tridonic LED module included

Colour temperature:

3000K or 4000K

Colour Rendering Index (CRI)

>80 in standard, other on request

Driver:

Electronic driver in standard, DALI on request

Emergency unit:

on request - Standard or DALI3 hour emergency unit

Movement sensor:

on request

Daylight control sensor:

on request

Operating temperature range:

0°C ... +40°C

IP Class:

IP20 in standard, IP44 on request

Power:

220-240V 50/60Hz

Lighting direction:

Direct index nr. 6593.XXXX or Direct / indirect - index nr. 6593.UD.XXXX

Reflector type:

Aluminium white

Light distribution:

Symmetric

Diffuser:

White acrylic diffuser [WD] in standard, acrylic frosted [AC], microprismatic [MPR] or any other on request.

General data:

5 Years standard warranty


UGR<19 diffuser on request
Luminaires can be connected into long lighting lines

Different lumen output or wattage available on request
All other technical features such as: Luminaire Efficacy, LOR, Lumen maintenance L/B etc. available in our pricelist

Wattage of products may vary due to constant LED efficacy improvements. Luminous flux & Luminaire Power tolerance +/- 10%.

System power consumption (LED module & driver) depends on components used

Colour temp. [K]	CRI	Lifetime [h]	Warranty [Years]	MacAdam [SDCM]	Length [mm]	Weight [kg]
3000	Ra > 80	50.000	5	3	587	1,5
4000	Ra > 80	50.000	5	3	587	1,5
3000	Ra > 80	50.000	5	3	868	2,00
4000	Ra > 80	50.000	5	3	868	2,00
3000	Ra > 80	50.000	5	3	1149	2,5
4000	Ra > 80	50.000	5	3	1149	2,5
3000	Ra > 80	50.000	5	3	1430	3,5
4000	Ra > 80	50.000	5	3	1430	3,5
3000	Ra > 80	50.000	5	3	1149	2,5
4000	Ra > 80	50.000	5	3	1149	2,5
3000	Ra > 80	50.000	5	3	1430	3,5
4000	Ra > 80	50.000	5	3	1430	3,5



Accessories



6247.15



6564.15


Index no.	Steel wire suspension
6247.15	single 1,5 m long suspension set for PROFI luminaire - 2 pcs. Per luminaire needed.
6564.15	1,5 m long transparent power cable with ceiling base and terminal block




[WD] diffuser

[AC] diffuser

[MPR] diffuser



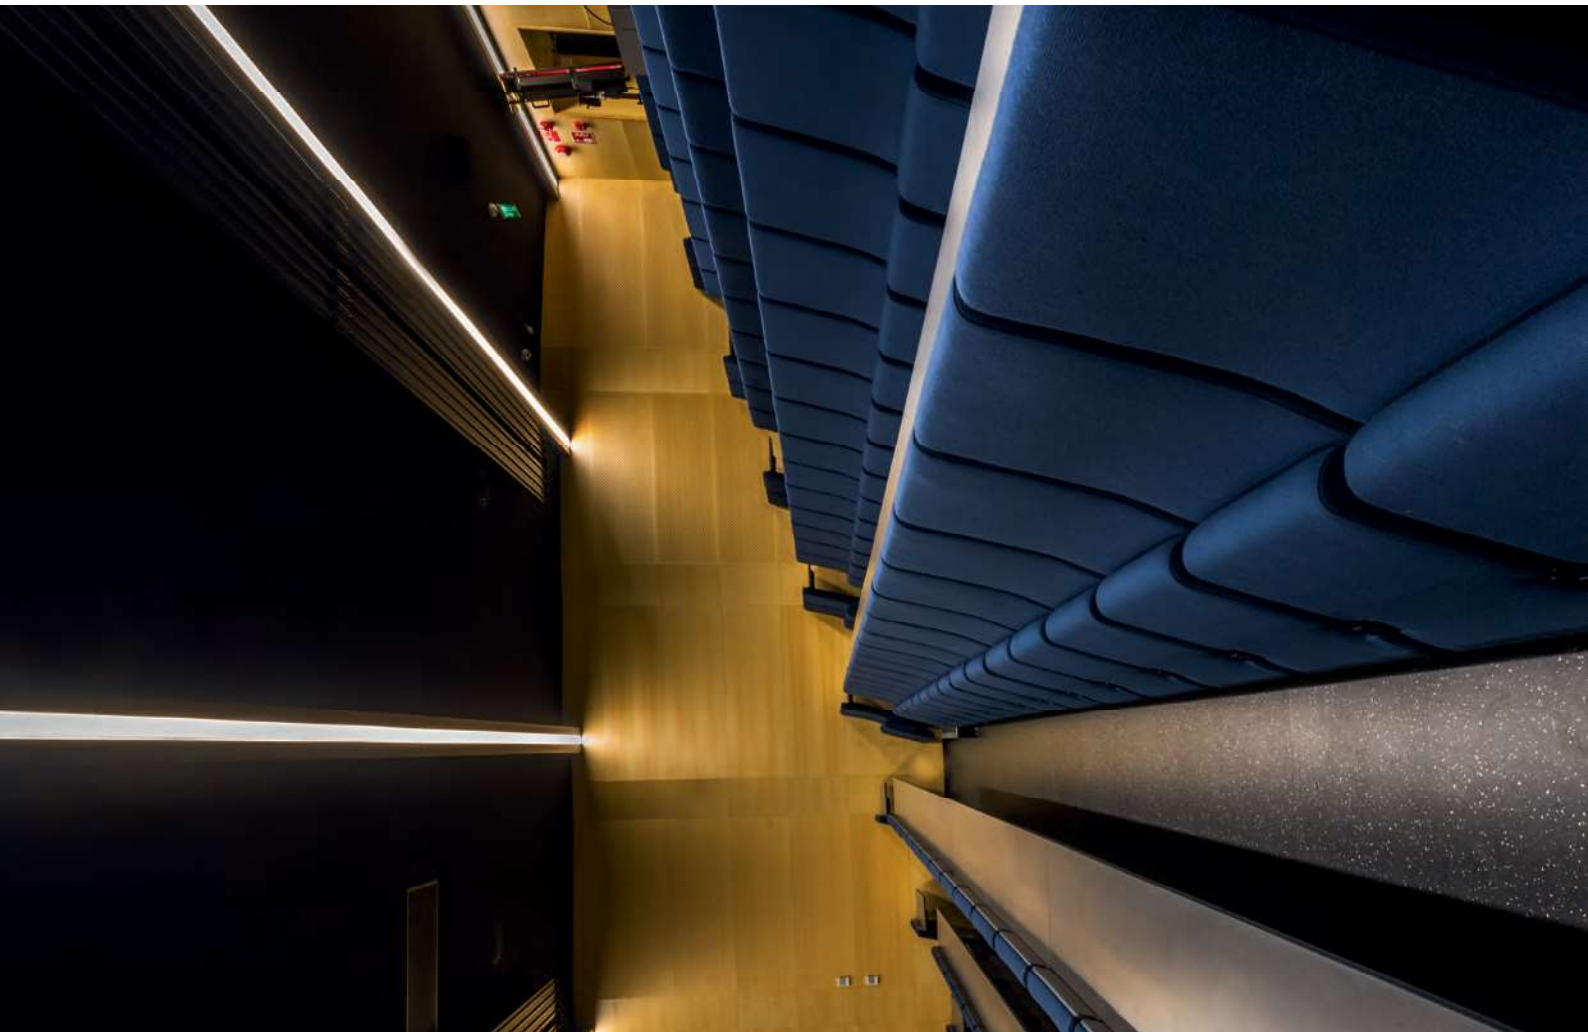



- Colour:** Standard Grey 3000, other RAL colours on request (please add RAL code after index number)
- LED module:** Philips / Osram or Tridonic LED module included
- Colour temperature:** 3000K or 4000K
- Colour Rendering Index (CRI):** >80 in standard, other on request
- Driver:** Electronic driver in standard, DALI on request
- Emergency unit:** on request - Standard or DALI 3 hour emergency unit
- Movement sensor:** on request
- Daylight control sensor:** on request
- Operating temperature range:** 0°C ... +40°C
- IP Class:** IP20 in standard, IP44 on request
- Power:** 220-240V 50/60Hz
- Lighting direction:** Direct / indirect
- Reflector type:** Aluminium white
- Light distribution:** Symmetric
- Diffuser:** White acrylic diffuser [WD] in standard, acrylic frosted [AC], microprismatic [MPR] or any other on request.
- General data:** 5 Years standard warranty
UGR<19 diffuser on request
Luminaires can be connected into long lighting lines
Different lumen output or wattage available on request
All other technical features such as: Luminaire Efficacy, LOR, Lumen maintenance L/B etc. available in our pricelist
Wattage of products may vary due to constant LED efficacy improvements: Luminous flux & Luminaire Power tolerance +/- 10%.
System power consumption (LED module & driver) depends on components used




Colour temp. [K]	CRI	Lifetime [h]	Warranty [Years]	MacAdam [SDCM]	Length [mm]	Weight [kg]
3000	Ra > 80	50.000	5	3	587	3,00
4000	Ra > 80	50.000	5	3	587	3,00
3000	Ra > 80	50.000	5	3	868	4,00
4000	Ra > 80	50.000	5	3	868	4,00
3000	Ra > 80	50.000	5	3	1149	5,00
4000	Ra > 80	50.000	5	3	1149	5,00
3000	Ra > 80	50.000	5	3	1430	7,00
4000	Ra > 80	50.000	5	3	1430	7,00

ing suspension set included.

[AC] diffuser

[MPR] diffuser







Body material:

Aluminium profile

Colour:

Standard Gray 9006, other RAL colours on request (please add RAL code after index number)

LED module:

Philips / Osram or Tridonic LED module included

Colour temperature:

3000K or 4000K

Colour Rendering Index (CRI)

>80 in standard, other on request

Driver:

Electronic driver in standard, DALI on request

Emergency unit:

on request - Standard or DALI3 hour emergency unit

Movement sensor:

on request

Daylight control sensor:

on request

Operating temperature range:

0°C ... +40°C

IP Class:

IP20 in standard, IP44 on request

Power:

220-240V 50/60Hz

Lighting direction:

Direct index nr. 4589.XXXX or Direct / indirect - index nr. 4589.UD.XXXX

Reflector type:

Aluminium white

Light distribution:

Symmetric

Diffuser:

White acrylic diffuser [WD] in standard, acrylic frosted [AC], microprismatic [MPR] or any other on request.

General data:

5 Years standard warranty

UGR<19 diffusor on request

Luminaires can be connected into long lighting lines

Different lumen output or wattage available on request

All other technical features such as: Luminare Efficacy, LOR, Lumen maintenance L/B etc. available in our pricelist



Wattage of products may vary due to constant LED efficacy improvements. Luminous flux & Luminare Power tolerance +/- 10%.

System power consumption (LED module & driver) depends on components used



Colour temp. [K]	CRI	Lifetime [h]	Warranty [Years]	MacAdam [SDCM]	Length [mm]	Weight [kg]
3000	Ra > 80	50.000	5	3	587	1,70
4000	Ra > 80	50.000	5	3	587	1,70
3000	Ra > 80	50.000	5	3	868	2,20
4000	Ra > 80	50.000	5	3	868	2,20
3000	Ra > 80	50.000	5	3	1149	2,70
4000	Ra > 80	50.000	5	3	1149	2,70
3000	Ra > 80	50.000	5	3	1430	3,70
4000	Ra > 80	50.000	5	3	1430	3,70
3000	Ra > 80	50.000	5	3	1149	2,70
4000	Ra > 80	50.000	5	3	1149	2,70
3000	Ra > 80	50.000	5	3	1430	3,70
4000	Ra > 80	50.000	5	3	1430	3,70

3000	Ra > 80	50.000	5	3	1149	2,70
4000	Ra > 80	50.000	5	3	1149	2,70
3000	Ra > 80	50.000	5	3	1430	3,70
4000	Ra > 80	50.000	5	3	1430	3,70



Accessories



6247.15



6564.15

Index no.

Steel wire suspension

6247.15 single 1,5 m long suspension set for PROFI luminaire - 2 pcs. Per luminaire needed.

6564.15 1,5 m long transparent power cable with ceiling base and terminal block

UP/DN version



[WD] diffuser

[AC] diffuser

[MPR] diffuser





Colour:

LED module:

Colour temperature:

Colour Rendering Index (CRI)

Driver:

Emergency unit:

Movement sensor:

Daylight control sensor:

Operating temperature range:

IP Class:

Power:

Lighting direction:

Reflector type:

Light distribution:

Diffuser:

General data:

Colour temp. [K]	CRI	Lifetime [h]	Warranty [Years]	MacAdam [SDCM]	Length [mm]	Weight [kg]
3000	Ra > 80	50.000	5	3	601	1,70
4000	Ra > 80	50.000	5	3	601	1,70
3000	Ra > 80	50.000	5	3	882	2,20
4000	Ra > 80	50.000	5	3	882	2,20
3000	Ra > 80	50.000	5	3	1163	2,70
4000	Ra > 80	50.000	5	3	1163	2,70
3000	Ra > 80	50.000	5	3	1444	3,70
4000	Ra > 80	50.000	5	3	1444	3,70
3000	Ra > 80	50.000	5	3	1163	2,70
4000	Ra > 80	50.000	5	3	1163	2,70
3000	Ra > 80	50.000	5	3	1444	3,70
4000	Ra > 80	50.000	5	3	1444	3,70

AC] diffuser

[MPR] diffuser

Colours on request (please add RAL code after index number)

Philips / Osram or Tridonic LED module included

3000K or 4000K
>80 in standard, other on request

Electronic driver in standard, DALI on request

on request - Standard or DALI3 hour emergency unit

on request

on request

0°C... +40°C

IP20 in standard, IP44 on request

220-240V 50/60Hz

Direct

Aluminium white

Symmetric

White acrylic diffuser [WD] in standard, acrylic frosted [AC], microprismatic [MPR] or any other on request.

5 Years standard warranty

UCR<19 diffuser on request

Luminaires can be connected into long lighting lines


Different lumen output or wattage available on request

All other technical features such as: Luminaire Efficacy, LOR, Lumen maintenance L/B etc. available in our pricelist


Wattage of products may vary due to constant LED efficacy improvements. Luminous flux & Luminaire Power tolerance +/- 10%.

System power consumption (LED module & driver) depends on components used

L - 590 x 84
L - 870 x 84
L - 1150 x 84
L - 1430 x 84



80

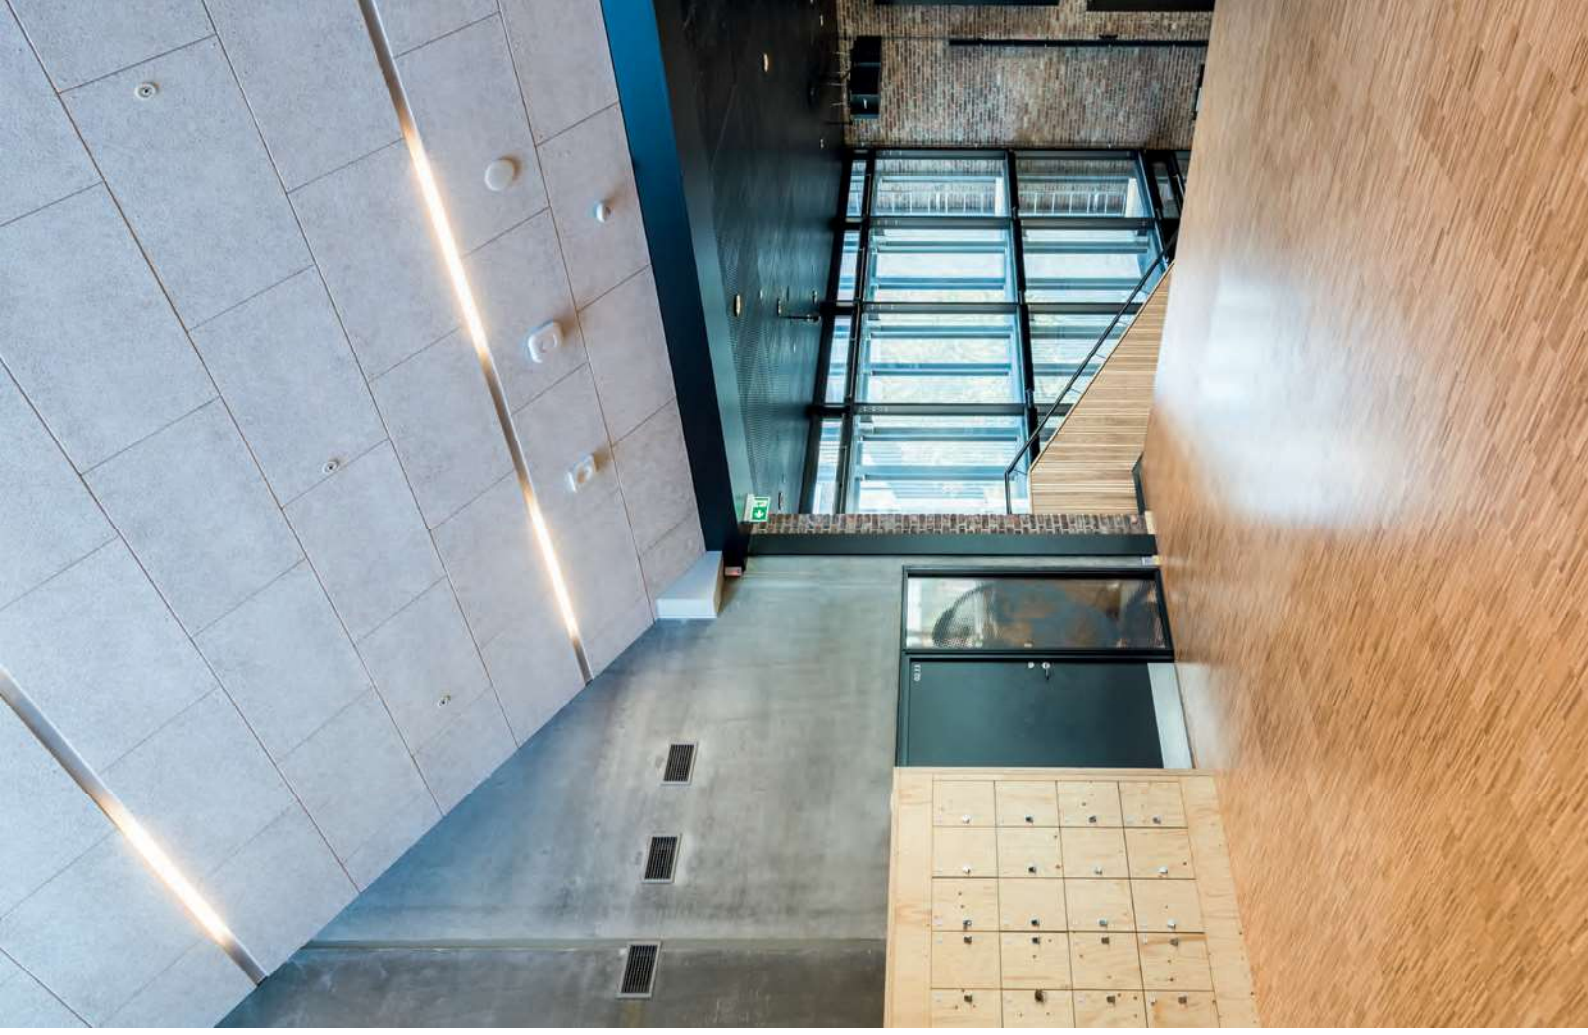





Body material: Aluminium profile

Colour: Standard Gray 9006, other RAL colours on request (please add RAL code after index number)

LED module: Philips / Osram or Tridonic LED module included

Colour temperature: 3000K or 4000K

Colour Rendering Index (CRI) >80 in standard, other on request

Driver: Electronic driver in standard, DALI on request

Emergency unit: on request - Standard or DALI3 hour emergency unit

Movement sensor: on request

Daylight control sensor: on request

Operating temperature range: 0°C ... +40°C

IP Class: IP20 in standard, IP44 on request

Power: 220-240V 50/60Hz

Lighting direction: Direct

Reflector type: Aluminium white

Light distribution: Symmetric

Diffuser: White acrylic diffuser [WD] in standard, acrylic frosted [AC], microprismatic [MPR] or any other on request.

General data: 5 Years standard warranty

UCR<19 diffuser on request

Luminaires can be connected into long lighting lines

Different lumen output or wattage available on request

All other technical features such as: Luminaires Efficacy, LOR, Lumen maintenance L/B etc. available in our pricelist

Wattage of products may vary due to constant LED efficacy improvements. Luminous flux & Luminaires Power tolerance +/- 10%.

System power consumption (LED module & driver) depends on components used



Colour temp. [K]	CRI	Lifetime [h]	Warranty [Years]	MacAdam [SDCM]	Length [mm]	Weight [kg]
3000	Ra > 80	50.000	5	3	587	2,00s
4000	Ra > 80	50.000	5	3	587	2,00
3000	Ra > 80	50.000	5	3	868	2,50
4000	Ra > 80	50.000	5	3	868	2,50
3000	Ra > 80	50.000	5	3	1149	3,00
4000	Ra > 80	50.000	5	3	1149	3,00
3000	Ra > 80	50.000	5	3	1430	4,00
4000	Ra > 80	50.000	5	3	1430	4,00



Accessories



6247.15



6564.15

Index no.	Steel wire suspension
6247.15	single 1,5 m long suspension set for PROFI luminaire - 2 pcs. Per luminaire needed.
6564.15	1,5 m long transparent power cable with ceiling base and terminal block


[WD] diffuser



[AC] diffuser



[MPR] diffuser



RAL code after index number /

LED module: Philips / Osram or Tridonic LED module included

Colour temperature: 3000K or 4000K

Colour Rendering Index (CRI): >80 in standard, other on request

Driver: Electronic driver in standard, DALI on request

Emergency unit: on request - Standard or DALI 3 hour emergency unit

Movement sensor: on request

Daylight control sensor: on request

Operating temperature range: 0°C ... +40°C

IP Class: IP20 in standard, IP44 on request

Power: 220-240V 50/60Hz

Lighting direction: Direct

Reflector type: Aluminium white

Light distribution: Symmetric

Diffuser: White acrylic diffuser (WD) in standard, acrylic frosted (AC), microprismatic (MPR) or any other on request.

General data: 5 Years standard warranty

UGR<19 diffuser on request
Luminaires can be connected into long lighting lines

Different lumen output or wattage available on request

All other technical features such as: Luminaire Efficacy, LOR, Lumen maintenance L/B etc. available in our pricelist

Wattage of products may vary due to constant LED efficacy improvements. Luminous flux & Luminaire Power tolerance +/- 10%.

System power consumption (LED module & driver) depends on components used



Colour temp. [K]	CRI	Lifetime [h]	Warranty [Years]	MacAdam [SDCM]	Length [mm]	Weight [kg]
3000	Ra > 80	50.000	5	3	587	2,00
4000	Ra > 80	50.000	5	3	587	2,00
3000	Ra > 80	50.000	5	3	868	2,50
4000	Ra > 80	50.000	5	3	868	2,50



AC] diffuser

[MPR] diffuser





LED module:
Philips / Osram or Tridonic LED module included

Colour temperature:
3000K or 4000K

Colour Rendering Index (CRI):
>80 in standard, other on request

Driver:
Electronic driver in standard, DALI on request

Emergency unit:
on request - Standard or DALI 3 hour emergency unit

Movement sensor:
on request

Daylight control sensor:
on request

Operating temperature range:
0°C... +40°C

IP Class:
IP20 in standard, IP44 on request

Power:
220-240V 50/60Hz


Lighting direction:
Direct / indirect

Reflector type:
Aluminium white


Light distribution:
Symmetric

Diffuser:
White acrylic diffuser (WD) in standard, acrylic frosted (AC), microprismatic (MPR) or any other on request.

General data:
5 Years standard warranty
UCR<19 diffuser on request
Luminaires can be connected into long lighting lines
Different lumen output or wattage available on request
All other technical features such as: Luminaire Efficacy, LOR, Lumen maintenance L/B etc. available in our pricelist
Wattage of products may vary due to constant LED efficacy improvements. Luminous flux & Luminaire Power tolerance +/- 10%.

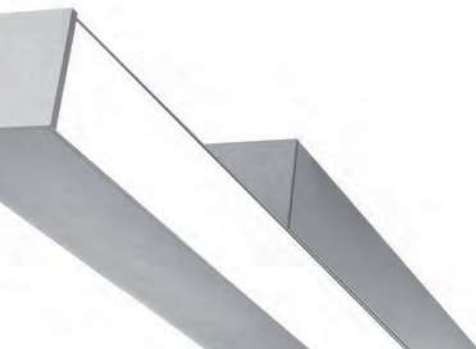

Available versions



Colour temp. [K]	CRI	Lifetime [h]	Warranty [Years]	MacAdam [SDCM]	Length [mm]	Weight [kg]
3000	Ra > 80	50.000	5	3	587	2,30
4000	Ra > 80	50.000	5	3	587	2,30
3000	Ra > 80	50.000	5	3	868	2,80
4000	Ra > 80	50.000	5	3	868	2,80



Index no.	Lumen output [lm]	Power [W]	Colour temp. [K]	CRI	Lifetime [h]	Warranty [Years]	MacAdam [SDCM]	Length [mm]	Weight [kg]
6599.4400/830	4400	30	3000	Ra > 80	50.000	5	3	587	3,00
6599.4400/840	4400	30	4000	Ra > 80	50.000	5	3	587	3,00
6599.6600/830	6600	46	3000	Ra > 80	50.000	5	3	868	4,00
6599.6600/840	6600	46	4000	Ra > 80	50.000	5	3	868	4,00
6599.8800/830	8800	58	3000	Ra > 80	50.000	5	3	1149	5,00
6599.8800/840	8800	58	4000	Ra > 80	50.000	5	3	1149	5,00
6599.11000/830	11000	72	3000	Ra > 80	50.000	5	3	1430	7,00
6599.11000/840	11000	72	4000	Ra > 80	50.000	5	3	1430	7,00


[AC] diffuser

[MPR] diffuser

[WD] diffuser

[AC] diffuser

[MPR] diffuser

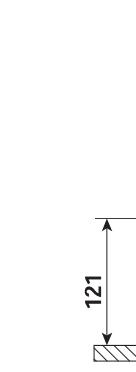

121



- index nr. 3506.UD.XXXX,
suspension wires included

Body material:

Colour:

LED module:

Colour temperature:

Colour Rendering Index (CRI)

Driver:

Emergency unit:

Movement sensor:

Daylight control sensor:

Operating temperature range:

IP Class:

Power:

Lighting direction:

Reflector type:

Light distribution:

Diffuser:

General data:



Colour temp. [K]	CRI	Lifetime [H]	Warranty [Years]	MacAdam [SDCM]	Length [mm]	Weight [kg]
3000	Ra > 80	50.000	5	3	1250	3,20
4000	Ra > 80	50.000	5	3	1250	3,20
3000	Ra > 80	50.000	5	3	1250	3,20
4000	Ra > 80	50.000	5	3	1250	3,20
3000	Ra > 80	50.000	5	3	1250	3,20
4000	Ra > 80	50.000	5	3	1250	3,20
3000	Ra > 80	50.000	5	3	1250	3,20
4000	Ra > 80	50.000	5	3	1250	3,20
3000	Ra > 80	50.000	5	3	1250	3,20
4000	Ra > 80	50.000	5	3	1250	3,20

ACI diffuser

[MPR] diffuser

Aluminium profile

Standard Gray 9006, other RAL colours on request (please add RAL code after index number)

Philips / Osram or Tridonic LED module included

3000K or 4000K

>80 in standard, other on request

Electronic driver in standard, DALI on request

on request - Standard or DALI3 hour emergency unit

on request

on request

0°C ... +40°C

IP20 in standard, IP44 on request

220-240V 50/60Hz

Direct index nr. 3506.XXXX or Direct / indirect - index nr. 3506.UD.XXXX

Aluminium white

Symmetric

White acrylic diffuser (WD) in standard, acrylic frosted (AC), microprismatic (MPR) or any other on request.

5 Years standard warranty

UGR<19 diffusor on request

Luminaires can be connected into long lighting lines

Different lumen output or wattage available on request

All other technical features such as: Luminaire Efficacy, LOR, Lumen maintenance L/B etc. available in our pricelist



Wattage of products may vary due to constant LED efficacy improvements. Luminous flux & Luminaire Power tolerance +/-10%.

System power consumption (LED module & driver) depends on components used



Index no.	Lumen output [lm]	Power [W]	Colour temp. [K]	CRI	Lifetime [H]	Warranty [Years]	MacAdam [SDCM]	Length [mm]	Weight [kg]
3507.4400/830	4400	29	3000	Ra > 80	50.000	5	3	1250	3,20
3507.4400/840	4400	29	4000	Ra > 80	50.000	5	3	1250	3,20
3507.8000/830	8000	54	3000	Ra > 80	50.000	5	3	1250	3,20
3507.8000/840	8000	54	4000	Ra > 80	50.000	5	3	1250	3,20

Available versions



Colour:

LED module

Colour tem

Colour Ren
(CRI)

Driver:

Emergency

Movement

Daylight co

Operating
range:

IP Class:

Power:

Lighting di

Reflector t

Light distri

Diffuser:

General da

- index nr. 3505.UD.XXXX,
suspension wires included

Aluminium profile

Standard Gray 9006, other RAL
colours on request (please add
RAL code after index number)

Philips / Osram or Tridonic LED
module included

3000K or 4000K

>80 in standard, other on
request

Electronic driver in standard,
DALI on request

on request - Standard or DALI3
hour emergency unit

on request

on request

0°C ... +40°C

IP20 in standard, IP44 on
request

220-240V 50/60Hz

Direct index nr. 3505.XXXX
or Direct / indirect - index nr.
3505.UD.XXXX

Aluminium white

Symmetric

White acrylic diffuser (WD) in
standard, acrylic frosted (AC),
microprismatic (MPR) or any
other on request.

5 Years standard warranty

UGR<19 diffuser on request

Different lumen output or
wattage available on request

All other technical features
such as: Luminaire Efficacy,
LOR, Lumen maintenance L/B
etc. available in our pricelist

Wattage of products may vary
due to constant LED efficacy
improvements. Luminous flux
& Luminaire Power tolerance
+/-10%.

System power consumption
(LED module & driver) depends
on components used



Body material:

Colour:

LED module:

Colour temperature:

Colour Rendering Index
(CRI)

Driver:

Emergency unit:

Movement sensor:

Daylight control sensor:

Operating temperature
range:

IP Class:

Power:

Lighting direction:


Reflector type:

Light distribution:

Diffuser:

General data:

Index no.	Lumen output [lm]	Power [W]	Colour temp. [K]	CRI	Lifetime [h]	Warranty [Years]	MacAdam [SDCM]	Weight [kg]
6598.9900/830	9900	69	3000	Ra > 80	50.000	5	3	7,00
6598.9900/840	9900	69	4000	Ra > 80	50.000	5	3	7,00





Colour:

LED module:

Colour temperature:

Colour Rendering Index (CRI)

Driver:

Emergency unit:

Movement sensor:

Daylight control sensor:

Operating temperature range:

IP Class:

Power:

Lighting direction:

Reflector type:

Light distribution:

Diffuser:

General data:

Colours on request (please add RAL code after index number)

Philips / Osram or Tridonic LED module included

3000K or 4000K

>80 in standard, other on request

Electronic driver in standard, DALI on request

on request - Standard or DALI3 hour emergency unit

on request

on request

0°C... +40°C

IP20 in standard, IP44 on request

220-240V 50/60Hz

Direct

Aluminium white

Symmetric

White acrylic diffuser (WD) in standard, acrylic frosted (AC), microprismatic (MPR) or any other on request.

5 Years standard warranty

UGR<19 diffuser on request

Different lumen output or wattage available on request

All other technical features such as: Luminaire Efficacy LOR, Lumen maintenance L/B etc. available in our pricelist

Wattage of products may vary due to constant LED efficacy improvements. Luminous flux & Luminaire Power tolerance +/- 10%.

System power consumption (LED module & driver) depends on components used

Colour:

LED module:

Colour temperature:

Colour Rendering Index (CRI)

Driver:

Emergency

Movement

Daylight control

Operating temperature range:

IP Class:

Power:

Lighting direction:

Reflector type:

Light distribution:


Diffuser:

General data:



Colour temp. [K]	CRI	Lifetime [h]	Warranty [Years]	MacAdam [SDCM]	Length [mm]	Weight [kg]
3000	Ra > 80	50.000	5	3	960	7,50
4000	Ra > 80	50.000	5	3	960	7,50
3000	Ra > 80	50.000	5	3	1240	9,00
4000	Ra > 80	50.000	5	3	1240	9,00
3000	Ra > 80	50.000	5	3	1550	12,00
4000	Ra > 80	50.000	5	3	1550	12,00

Index no.	Lumen output [lm]	Power [W]	Colour temp. [K]	CRI	Lifetime [h]	Warranty [Years]	MacAdam [SDCM]	Weight [kg]
4552.4800/830	4800	70	3000	Ra > 80	30.000	3	3	4,80
4552.4800/840	4800	70	4000	Ra > 80	30.000	3	3	4,80



Colour:

Colours on request (please add RAL code after index number)

LED module:

Philips / Osram or Tridonic LED module included

Colour temperature:

3000K or 4000K

Colour Rendering Index (CRI)

>80 in standard, other on request

Driver:

Electronic driver in standard, DALI on request

Emergency unit:

on request - Standard or DALI3 hour emergency unit

Movement sensor:

on request

Daylight control sensor:

on request

Operating temperature range:

0°C... +40°C

IP Class:

IP20 in standard, IP44 on request

Power:

220-240V 50/60Hz

Lighting direction:

Direct

Reflector type:

Aluminium white

Light distribution:

Symmetric

Diffuser:

White acrylic diffuser (WD) in standard, acrylic frosted (AC), microprismatic (MPR) or any other on request.

General data:

5 Years standard warranty

UCR<19 diffuser on request

Different lumen output or wattage available on request

All other technical features such as: Luminaire Efficacy LOR, Lumen maintenance L/B etc. available in our pricelist

Wattage of products may vary due to constant LED efficacy improvements. Luminous flux & Luminaire Power tolerance +/- 10%.

System power consumption (LED module & driver) depends on components used

Colour:

LED module:

Philips / Osram or Tridonic LED module included

Colour temperature:

3000K or 4000K

Colour Rendering Index (CRI)

>80 in standard, other on request

Driver:

Electronic driver in standard, DALI on request

Emergency:

on request - Standard or DALI3 hour emergency unit

Movement sensor:

on request

Daylight control sensor:

on request

Operating temperature range:

0°C... +40°C

IP Class:

IP20 in standard, IP44 on request

Power:

220-240V 50/60Hz

Lighting direction:

Direct

Reflector type:

Aluminium white

Light distribution:

Symmetric

Diffuser:

White acrylic diffuser (WD) in standard, acrylic frosted (AC), microprismatic (MPR) or any other on request.

General data:

5 Years standard warranty

UCR<19 diffuser on request

Different lumen output or wattage available on request

All other technical features such as: Luminaire Efficacy LOR, Lumen maintenance L/B etc. available in our pricelist

Wattage of products may vary due to constant LED efficacy improvements. Luminous flux & Luminaire Power tolerance +/- 10%.

System power consumption (LED module & driver) depends on components used



Colour:

LED module:

Philips / Osram or Tridonic LED module included

Colour temperature:

3000K or 4000K

Colour Rendering Index (CRI)

>80 in standard, other on request

Driver:

Electronic driver in standard, DALI on request

Emergency:

on request - Standard or DALI3 hour emergency unit

Movement sensor:

on request

Daylight control sensor:

on request

Operating temperature range:

0°C... +40°C

IP Class:

IP20 in standard, IP44 on request

Power:

220-240V 50/60Hz

Lighting direction:

Direct

Reflector type:

Aluminium white

Light distribution:

Symmetric

Diffuser:

White acrylic diffuser (WD) in standard, acrylic frosted (AC), microprismatic (MPR) or any other on request.

General data:

5 Years standard warranty



UCR<19 diffuser on request

Different lumen output or wattage available on request

All other technical features such as: Luminaire Efficacy LOR, Lumen maintenance L/B etc. available in our pricelist


Wattage of products may vary due to constant LED efficacy improvements. Luminous flux & Luminaire Power tolerance +/- 10%.

System power consumption (LED module & driver) depends on components used



Colour temp. [K]	CRI	Lifetime [h]	Warranty [Years]	MacAdam [SDCM]	Weight [kg]
3000	Ra > 80	50.000	5	3	15,00
4000	Ra > 80	50.000	5	3	15,00

Index no.	Lumen output [lm]	Power [W]	Colour temp. [K]	CRI	Lifetime [h]	Warranty [Years]	MacAdam [SDCM]	Length [mm]	Weight [kg]
6595.8800/830	8800	60	3000	Ra > 80	50.000	5	3	1149	5,00
6595.8800/840	8800	60	4000	Ra > 80	50.000	5	3	1149	5,00
6595.13200/830	13200	92	3000	Ra > 80	50.000	5	3	1722	8,00
6595.13200/840	13200	92	4000	Ra > 80	50.000	5	3	1722	8,00
6595.17600/830	17600	116	3000	Ra > 80	50.000	5	3	2298	11,00
6595.17600/840	17600	116	4000	Ra > 80	50.000	5	3	2298	11,00
6595.22000/830	22000	144	3000	Ra > 80	50.000	5	3	2870	15,00
6595.22000/840	22000	144	4000	Ra > 80	50.000	5	3	2870	15,00



Colour:

LED module:

Colour temperature:

Colour Rendering Index (CRI)

Driver:

Emergency unit:

Movement sensor:

Daylight control sensor:

Operating temperature range:

IP Class:

Power:

Lighting direction:

Reflector type:

Light distribution:

Diffuser:

General data:

Colours on request (please add RAL code after index number)

Philips / Osram or Tridonic LED module included

3000K or 4000K

>80 in standard, other on request

Electronic driver in standard, DALI on request

on request - Standard or DALI3 hour emergency unit

on request

on request

0°C... +40°C

IP20 in standard, IP44 on request

220-240V 50/60Hz

Direct

Aluminium white

Symmetric

White acrylic diffuser (WD) in standard, acrylic frosted (AC), microprismatic (MPR) or any other on request.

5 Years standard warranty

UGR<19 diffuser on request

Different lumen output or wattage available on request

All other technical features such as: Luminaire Efficacy LOR, Lumen maintenance L/B etc. available in our pricelist

Wattage of products may vary due to constant LED efficacy improvements. Luminous flux & Luminaire Power tolerance +/-10%.

System power consumption (LED module & driver) depends on components used



Colour temp. [K]	CRI	Lifetime [h]	Warranty [Years]	MacAdam [SDCM]	Weight [kg]
3000	Ra > 80	50.000	5	3	6,00
4000	Ra > 80	50.000	5	3	6,00
3000	Ra > 80	50.000	5	3	8,00
4000	Ra > 80	50.000	5	3	8,00

Colour:

LED module:

Colour temperature:

Colour Rendering Index (CRI)

Driver:

Emergency unit:

Movement sensor:

Daylight control sensor:

Operating temperature range:

IP Class:

Power:

Lighting direction:

Reflector type:



Light distribution:

Diffuser:

General data:



Index no.	Lumen output [lm]	Power [W]	Colour temp. [K]	CRI	Lifetime [h]	Warranty [Years]	MacAdam [SDCM]	Weight [kg]
6058.4400/830	4400	29	3000	Ra > 80	50.000	5	3	5,00
6058.4400/840	4400	29	4000	Ra > 80	50.000	5	3	5,00
6058.5500/830	5500	36	3000	Ra > 80	50.000	5	3	6,00
6058.5500/840	5500	36	4000	Ra > 80	50.000	5	3	6,00



arranged
or extend st
come with a
-just peel ar



Osram or equivalent LED stripe included
3000K or 4000K
>80 in standard, other on request
Remote electronic driver in standard, DALI on request
N/A
N/A
N/A
0°C...+40°C
IP20 in standard, IP44 on request
220-240V 50/60Hz
Direct
N/A
Symmetric
White LED Block
3 Years standard warranty
Different lumen output or wattage available on request
All other technical features such as: Luminaire Efficacy, LOR, Lumen maintenance, L/B etc. available in our pricelist
Wattage of products may vary due to constant LED efficacy improvements. Luminous flux & Luminaire Power tolerance +/- 10%.


LED module:
Colour temperature:
Colour Rendering Index (CRI)
Driver:
Emergency unit:
Movement sensor:
Daylight control sensor:
Operating temperature range:
IP Class:
Power:
Lighting direction:
Reflector type:
Light distribution:
Diffuser:
General data:



Colour temp. [K]	CRI	Lifetime [h]	Warranty [Years]	MacAdam [SDCM]	Length [mm]	Weight [kg]
3000K	Ra > 80	30.000	3	4	1000	0,40
4000K	Ra > 80	30.000	3	4	1000	0,40
6000K	Ra > 80	30.000	3	4	1000	0,40



Index no.	Description
2764.1M	Aluminium profile price per meter
6605.MB	Mounting Bracket
6606.EC	End cap



arranged in sets of 3, you can cut the strip and make new strips or extend strips to make any combination of 3 lights. LED strips come with adhesive tape backing for easy mounting. Easy to use -just peel and stick.



FLEXIBLE LED STRIPES SMD 2835 / 7,2W

Index no.	Description	Power [W]	Colour temp. [K]
4599.850/830	Flexible led stripe SMD2835 / 24V / 850 lm / 1m	7,2W/1m	3000
4599.890/840	Flexible led stripe SMD2835 / 24V / 890 lm / 1m	7,2W/1m	4000
4599.930/860	Flexible led stripe SMD2835 / 24V / 930 lm / 1m	7,2W/1m	6000

Description

Aluminium profile price per meter





FLEXIBLE LED STRIPES SMD 2835 / 14,4W

Index no.	Description	Power [W]	Colour temp. [K]
4599.1700/830	Flexible led stripe SMD2835 / 24V / 1700 lm / 1m	14,4W/1m	3000K
4599.1775/840	Flexible led stripe SMD2835 / 24V / 1775 lm / 1m	14,4W/1m	4000K
4599.1850/860	Flexible led stripe SMD2835 / 24V / 1850 lm / 1m	14,4W/1m	6000K

POWER SUPPLY FOR LED STRIPES

Index no.	Description
4598.10	Power supply 10 W / 24V
4598.15	Power supply 15 W / 24V
4598.20	Power supply 20 W / 24V
4598.30	Power supply 30 W / 24V
4598.45	Power supply 45 W / 24V
4598.60	Power supply 60 W / 24V
2801.00	Power supply 100 W / 24V



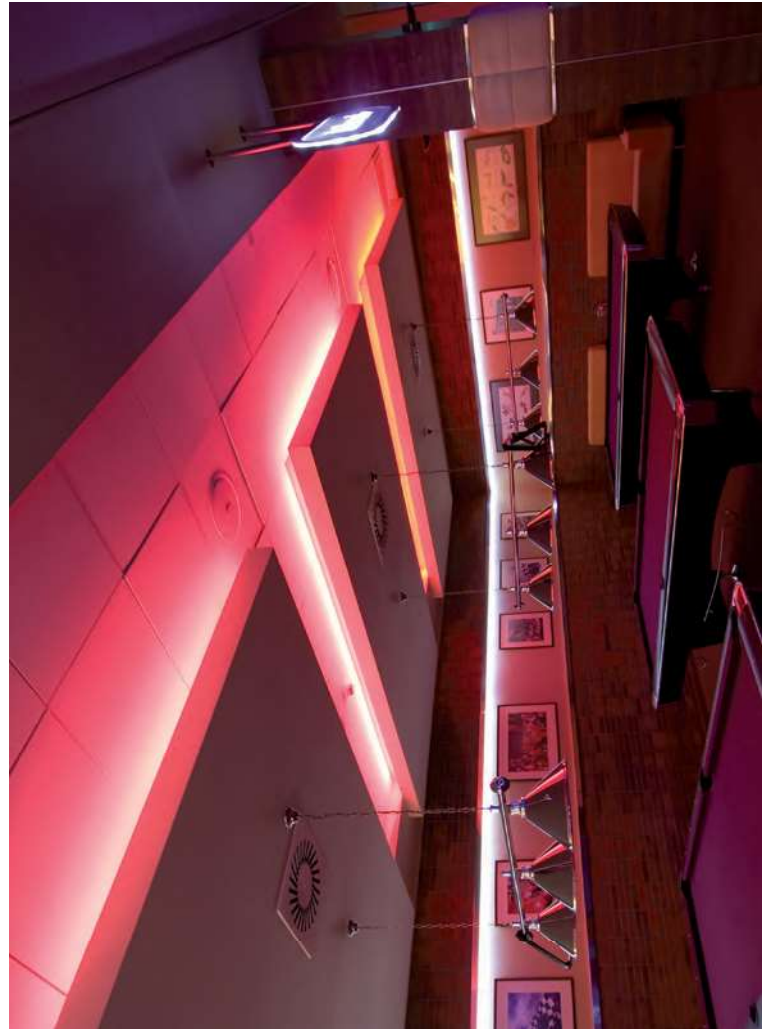

TOP BENDING

Index no.	Lumen output [lm]	Power [W]	Colour temp. [K]	Lifetime [h]	Warranty [Years]	MacAdam [SDCM]	Length [mm]
6602.490/827	490	7,2	2700	35.000	3	4	1000
6602.490/830	490	7,2	3000	35.000	3	4	1000
6602.480/840	480	7,2	4000	35.000	3	4	1000
6602.460/865	460	7,2	6500	35.000	3	4	1000

SIDE BENDING

Index no.	Lumen output [lm]	Power [W]	Colour temp. [K]	Lifetime [h]	Warranty [Years]	MacAdam [SDCM]	Length [mm]
6603.410/827	410	7,2	2700	35.000	3	4	1000
6603.410/830	410	7,2	3000	35.000	3	4	1000
6603.410/840	410	7,2	4000	35.000	3	4	1000
6603.350/865	350	7,2	6500	35.000	3	4	1000

DRIVERS

Index no.	Lumen output [lm]	Power [W]	IP rating	Lifetime [h]	Warranty [Years]
6604.30	OT30/220-240/24P	30	IP66	35.000	3
6604.50	OT50/220-240/24P	50	IP66	35.000	3
6604.80	OT80/220-240/24P	80	IP66	35.000	3
6604.120	OT120/220-240/24P	120	IP66	35.000	3



SUCURĂȚE DE
FIECĂRE MOMENT

5