



VICUS MINI



VICUS MIDI



VICUS MAXI



HERON



POLE LED



VALDEN






ALLERT DIN 140



add RAL code after index number)	
LED module:	Philips / Osram or Tridonic LED module included
Colour temperature:	3000K or 4000K
Colour Rendering Index (CRI):	>80 in standard
Driver:	Electronic driver
Emergency unit:	N/A
Movement sensor:	N/A
Daylight control sensor:	N/A
Operating temperature range:	- 20°C ... +40°C
IP Class:	IP65
Power:	220-240V 50/60Hz
Lighting direction:	Direct lighting with possibility of light direction adjustment
Reflector type:	N/A
Light distribution:	Symmetric
Diffusor:	Clear tempered glass in standard, mat on request
General data:	5 Years standard warranty
	All other technical features such as : Luminaire Efficacy, LOR, Lumen maintenance L/B etc. available in our pricelist
	Wattage of products may vary due to constant LED efficacy improvements: Luminous flux & Luminaire Power tolerance +/- 10%.
	System power consumption (LED module & driver) depends on components used

Colour temp. [K]	CRI	Lifetime [H]	Warranty [Years]	MacAdam [SDCM]	Weight [kg]
3000	Ra > 80	50.000	5	3	50,00
4000	Ra > 80	50.000	5	3	50,00



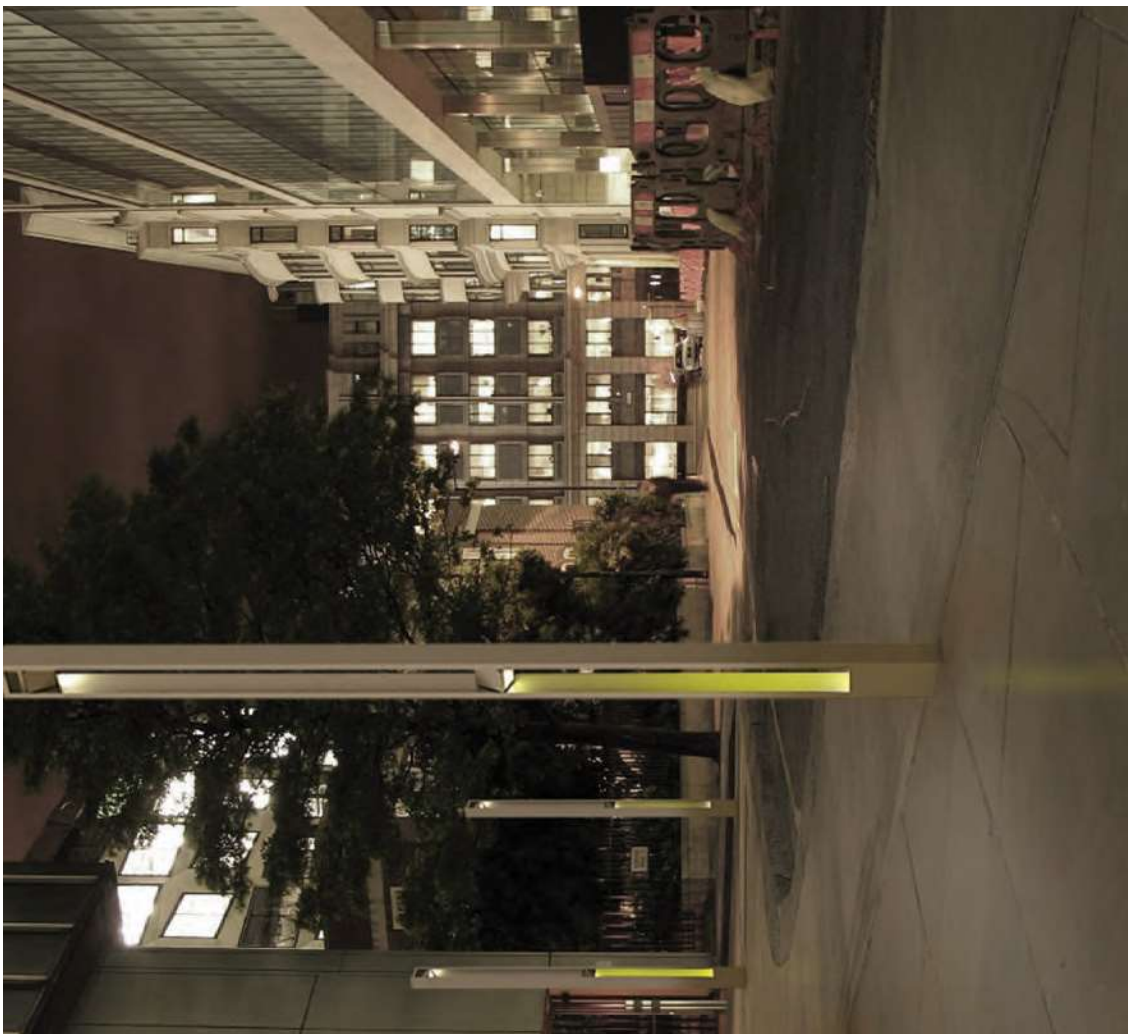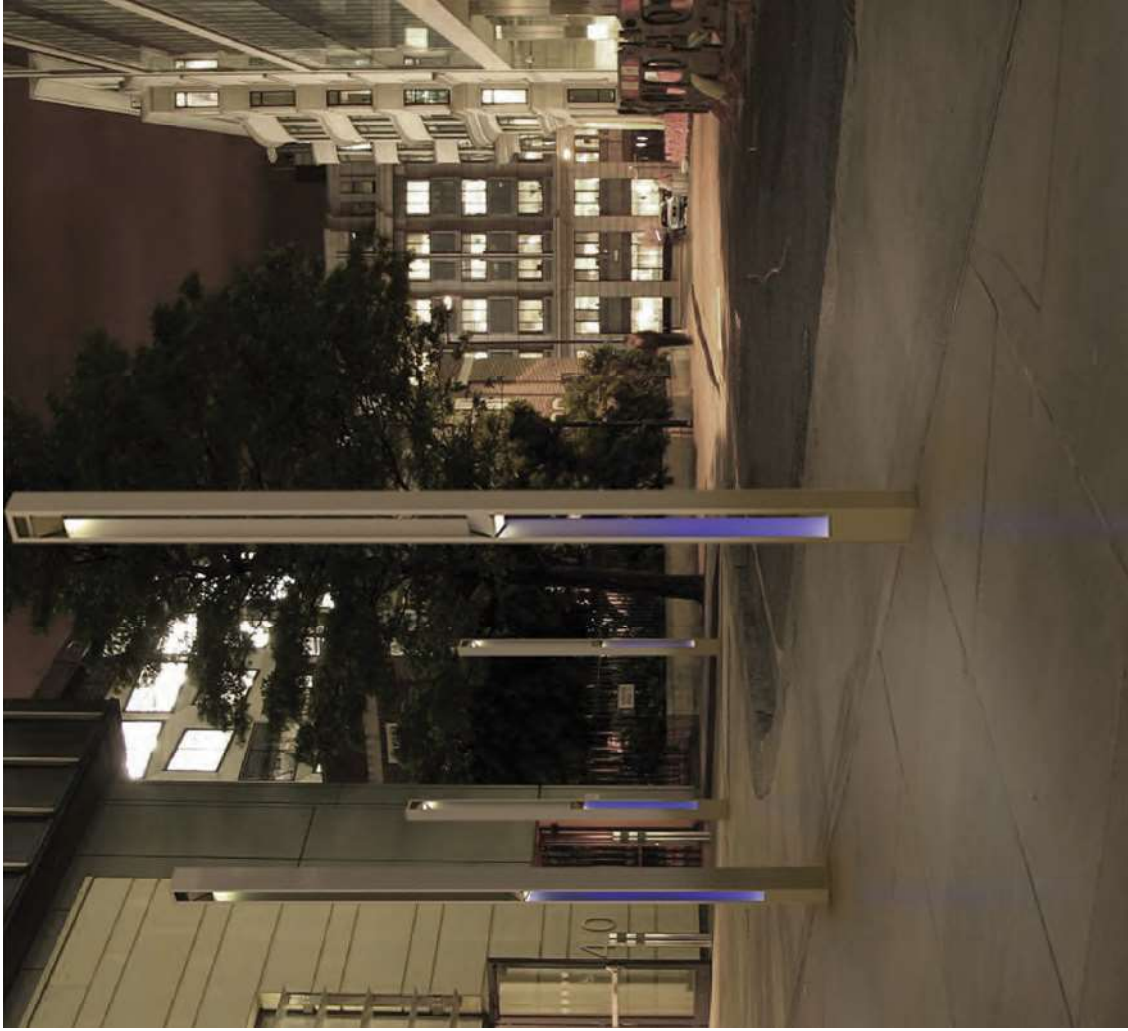



add RAL code after index number)

Philips / Osram or Tridonic LED module included

3000K or 4000K

>80 in standard

Electronic driver

N/A

N/A

N/A

- 20°C.....+40°C

IP65

220-240V 50/60Hz

Direct lighting with possibility of light direction adjustment

N/A

Symmetric

Clear tempered glass in standard, mat on request

5 Years standard warranty

All other technical features such as : Luminaire Efficacy, LOR, Lumen maintenance L/B etc. available in our pricelist

Wattage of products may vary due to constant LED efficacy improvements: Luminous flux & Luminaire Power tolerance +/- 10%.

System power consumption (LED module & driver) depends on components used

LED module:

Colour temperature:

Colour Rendering Index (CRI):

Driver:

Emergency unit:

Movement sensor:

Daylight control sensor:

Operating temperature range:

IP Class:

Power:

Lighting direction:

Reflector type:

Light distribution:

Diffusor:


General data:



designed by **Andrew Pruszyński**
www.bdesign.com.pl
technical development and production by Imperial



Colour temp. [K]	CRI	Lifetime [H]	Warranty [Years]	MacAdam [SDCM]	Weight [kg]
3000	Ra > 80	50.000	5	3	50,00
4000	Ra > 80	50.000	5	3	50,00





Philips / Osram or Tridonic LED module included

3000K or 4000K

>80 in standard

Electronic driver

N/A

N/A

N/A

- 20°C ... +40°C

IP65

220-240V 50/60Hz

Direct lighting with possibility of light direction adjustment

N/A

Symmetric

Clear tempered glass in standard, mat on request

5 Years standard warranty

Three heights in standard 400 mm / 600 mm and 900 mm

All other technical features such as : Luminaire Efficacy LOR, Lumen maintenance L/B etc. available in our pricelst

Wattage of products may vary due to constant LED efficacy improvements. Luminous flux & Luminaire Power tolerance +/- 10%.

System power consumption (LED module & driver) depends on components used

Colour temp. [K]	CRI	Lifetime [h]	Warranty [Years]	MacAdam [SDCM]	Weight [kg]
3000	Ra > 80	50.000	5	3	10,00
4000	Ra > 80	50.000	5	3	10,00
3000	Ra > 80	50.000	5	3	10,00
4000	Ra > 80	50.000	5	3	10,00
3000	Ra > 80	50.000	5	3	10,00
4000	Ra > 80	50.000	5	3	10,00

LED module:

Philips / Osram or Tridonic LED module included

Colour temperature:

3000K or 4000K

Colour Rendering Index (CRI)

>80 in standard

Driver:

Electronic driver

Emergency unit:

N/A

Movement sensor:

N/A

Daylight control sensor:

N/A

Operating temperature range:

- 20°C +40°C

IP Class:

IP65

Power:

220-240V 50/60Hz

Lighting direction:

Direct lighting

Reflector type:

N/A

Light distribution:

Symmetric

Diffusor:

Clear tempered glass in standard, mat on request

General data:

5 Years standard warranty

All other technical features such as : Luminaire Efficacy, LOR, Lumen maintenance L/B etc. available in our pricelist

Wattage of products may vary due to constant LED efficacy improvements. Luminous flux & Luminaire Power tolerance +/- 10%.

System power consumption (LED module & driver) depends on components used

LED module:

Philips / Osram or Tridonic LED module included

Colour temperature:

3000K or 4000K

Colour Rendering Index (CRI)

>80 in standard

Driver:

Electronic driver

Emergency unit:

N/A

Movement sensor:

N/A

Daylight control sensor:

N/A

Operating temperature range:

- 20°C +40°C

IP Class:

IP65

Power:

220-240V 50/60Hz

Lighting direction:

Direct lighting

Reflector type:

N/A

Light distribution:

Symmetric

Diffusor:

Clear tempered glass in standard, mat on request

General data:

5 Years standard warranty

All other technical features such as : Luminaire Efficacy, LOR, Lumen maintenance L/B etc. available in our pricelist

Wattage of products may vary due to constant LED efficacy improvements. Luminous flux & Luminaire Power tolerance +/- 10%.

System power consumption (LED module & driver) depends on components used

LED module:

Philips / Osram or Tridonic LED module included

Colour temperature:

3000K or 4000K

Colour Rendering Index (CRI)

>80 in standard

Driver:

Electronic driver

Emergency unit:

N/A

Movement sensor:

N/A

Daylight control sensor:

N/A

Operating temperature range:

- 20°C +40°C

IP Class:

IP65

Power:

220-240V 50/60Hz

Lighting direction:

Direct lighting

Reflector type:

N/A

Light distribution:

Symmetric

Diffusor:

Clear tempered glass in standard, mat on request

General data:

5 Years standard warranty


All other technical features such as : Luminaire Efficacy, LOR, Lumen maintenance L/B etc. available in our pricelist

Wattage of products may vary due to constant LED efficacy improvements. Luminous flux & Luminaire Power tolerance +/- 10%.

System power consumption (LED module & driver) depends on components used

Colour temp. [K]	CRI	Lifetime [H]	Warranty [Years]	MacAdam [SDCM]	Weight [kg]
3000	Ra > 80	50.000	5	3	7,00
4000	Ra > 80	50.000	5	3	7,00
3000	Ra > 80	50.000	5	3	7,00
4000	Ra > 80	50.000	5	3	7,00
3000	Ra > 80	50.000	5	3	7,00
4000	Ra > 80	50.000	5	3	7,00

Index no.	Lumen output [lm]	Power [W]	Colour temp. [K]	CRI	Lifetime [H]	Warranty [Years]	MacAdam [SDCM]	Length [mm]	Weight [kg]
2989.3000/830/1M	3000	27	3000	Ra > 80	50.000	5	3	1000	10,00
2989.3000/840/1M	3000	27	4000	Ra > 80	50.000	5	3	1000	10,00
2989.3000/830/15M	3000	27	3000	Ra > 80	50.000	5	3	1500	13,00
2989.3000/840/15M	3000	27	4000	Ra > 80	50.000	5	3	1500	13,00
2989.3000/830/3M	3000	27	3000	Ra > 80	50.000	5	3	3000	22,00
2989.3000/840/3M	3000	27	4000	Ra > 80	50.000	5	3	3000	22,00



add RAL code after index number)

LED module:
Philips / Osram or Tridonic LED module included

Colour temperature:
2700K, 3000K or 4000K

Colour Rendering Index (CRI)
>80 in standard

Driver:
Electronic driver

Emergency unit:
N/A

Movement sensor:
N/A

Daylight control sensor:
N/A

Operating temperature range:
- 20°C....+40°C

IP Class:
IP65

Power:
220-240V 50/60Hz

Lighting direction:
Direct lighting

Reflector type:
N/A

Light distribution:
Symmetric

Diffusor:
Clear tempered glass in standard, mat on request

General data:
5 Years standard warranty

All other technical features such as : Luminaire Efficacy, LOR, Lumen maintenance L/B etc. available in our pricelist

Wattage of products may vary due to constant LED efficacy improvements. Luminous flux & Luminaire Power tolerance +/- 10%.

System power consumption (LED module & driver) depends on components used

Colour:

LED modul

Colour tem

Colour Ren
(CRI)

Driver:

Emergency

Movement

Daylight co

Operating
range:

IP Class:

Power:

Lighting di

Reflector t

Light distri


Diffusor:


General da



Colour temp. [K]	CRI	Lifetime [H]	Warranty [Years]	MacAdam [SDCM]	Weight [kg]
2700	Ra > 80	50.000	5	3	10,00
3000	Ra > 80	50.000	5	3	10,00
4000	Ra > 80	50.000	5	3	10,00
2700	Ra > 80	50.000	5	3	10,00
3000	Ra > 80	50.000	5	3	10,00
4000	Ra > 80	50.000	5	3	10,00

Index no.	Lumen output [lm]	Power [W]	Colour temp. [K]	CRI	Lifetime [H]	Warranty [Years]	MacAdam [SDCM]	Weight [kg]
5374:1200/830/40D	1200	16	3000	Ra > 80	35.000	5	4	4,20
5374:1200/840/40D	1200	16	4000	Ra > 80	35.000	5	4	4,20
5374:1800/830/40D	1800	23	3000	Ra > 80	35.000	5	4	4,20
5374:1800/840/40D	1800	23	4000	Ra > 80	35.000	5	4	4,20



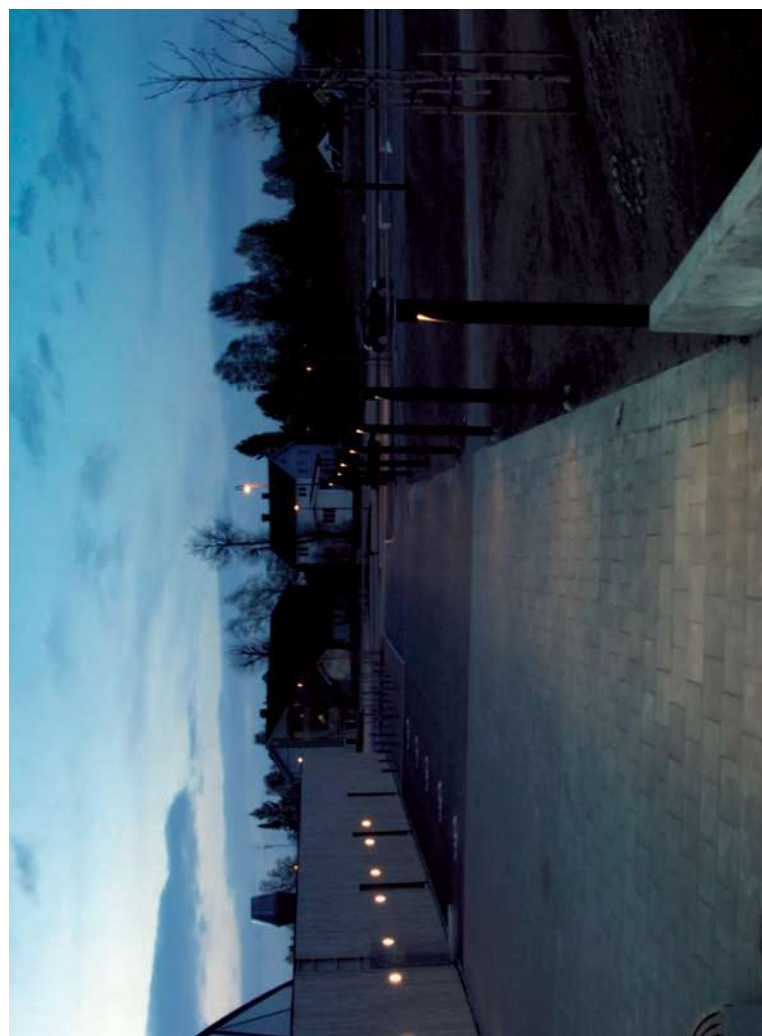

Colour:

LED module:
Osram LED module included

Colour temperature:
3000K or 4000K

Colour Rendering Index (CRI)
>80 in standard

Driver:
Electronic integrated driver

Emergency unit:
N/A

Movement sensor:
N/A

Daylight control sensor:
N/A

Operating temperature range:
- 20°C.....+40°C

IP Class:
IP65

Power:
220-240V 50/60Hz

Lighting direction:
Direct lighting

Reflector type:
N/A

Light distribution:
Symmetric

Diffusor:
Mat acrylic diffuser

General data:
5 Years standard warranty

All other technical features such as: Luminaire Efficacy, LOR, Lumen maintenance L/B etc. available in our pricelist

Wattage of products may vary due to constant LED efficacy improvements. Luminous flux & Luminaire Power tolerance +/- 10%.

System power consumption (LED module & driver) depends on components used

LED module

Colour temperature

Colour Rendering Index (CRI)

Driver:

Emergency

Movement

Daylight control

Operating temperature range:

IP Class:

Power:

Lighting direction

Reflector type


Light distribution

Diffusor:

General data



Colour temp. [K]	CRI	Lifetime [H]	Warranty [Years]	MacAdam [SDCM]	Weight [kg]
3000	Ra > 80	35.000	5	4	2,60
4000	Ra > 80	35.000	5	4	2,60
3000	Ra > 80	35.000	5	4	2,60
4000	Ra > 80	35.000	5	4	2,60



Index no.	Lumen output [lm]	Power [W]	Colour temp. [K]	CRI	Lifetime [H]	Warranty [Years]	MacAdam [SDCM]	Weight [kg]
6073.1300/830	1300	9	3000	Ra > 80	50.000	5	3	2,55
6073.1300/840	1300	9	4000	Ra > 80	50.000	5	3	2,55



LED module:

- Colour temperature: 3000K or 4000K
- Colour Rendering Index (CRI) >80 in standard
- Driver: Electronic driver
- Emergency unit: N/A
- Movement sensor: N/A
- Daylight control sensor: N/A
- Operating temperature range: - 20°C ... +40°C
- IP Class: IP65
- Power: 220-240V 50/60Hz
- Lighting direction: Direct lighting
- Reflector type: Integrated lenses
- Light distribution: Symmetric in standard, asymmetric on request
- Diffusor: Clear glass, other on request
- General data: 5 Years standard warranty

Philips, Osram or Tridonic LED module included

3000K or 4000K

>80 in standard

Electronic driver

N/A

N/A

N/A

- 20°C ... +40°C

IP65

220-240V 50/60Hz

Direct lighting

Integrated lenses

Symmetric in standard, asymmetric on request

Clear glass, other on request

5 Years standard warranty


All other technical features such as : Luminaire Efficacy, LOR, Lumen maintenance L/B etc. available in our pricelist

Wattage of products may vary due to constant LED efficacy improvements. Luminous flux & Luminaire Power tolerance +/- 10%.

System power consumption (LED module & driver) depends on components used



Colour temp. [K]	CRI	Lifetime [H]	Warranty [Years]	MacAdam [SDCM]	Weight [kg]
3000	Ra > 80	50.000	5	4	6,10
4000	Ra > 80	50.000	5	4	6,10



40

adu RAL code after index number)



- LED module
- Colour temperature
- Colour Rendering Index (CRI)
- Driver:
- Emergency
- Movement
- Daylight control
- Operating temperature range:
- IP Class:
- Power:
- Lighting direction
- Reflector type
- Light distribution
- Diffusor:
- General data



Index no.	Lumen output [lm]	Power [W]	Colour temp. [K]	CRI	Lifetime [H]	Warranty [Years]	MacAdam [SDCM]	Weight [kg]
6098:16600/830	16600	138	3000	Ra > 80	50.000	5	4	7,80
6098:16600/840	16600	138	4000	Ra > 80	50.000	5	4	7,80

add RAL code after index number)

Philips, Osram or Tridonic LED module included

3000K or 4000K

>80 in standard

Electronic driver

N/A

N/A

N/A

- 20°C.....+40°C

IP65

220-240V 50/60Hz

Direct lighting

Integrated lenses

Symmetric in standard, asymmetric on request

Clear glass, other on request

5 Years standard warranty

All other technical features such as : Luminaire Efficacy, LOR, Lumen maintenance L/B etc. available in our pricelist

Wattage of products may vary due to constant LED efficacy improvements. Luminous flux & Luminaire Power tolerance +/- 10%.

System power consumption (LED module & driver) depends on components used

LED module:

Colour temperature:

Colour Rendering Index (CRI)

Driver:

Emergency unit:

Movement sensor:

Daylight control sensor:

Operating temperature range:

IP Class:

Power:

Lighting direction:

Reflector type:

Light distribution:

Diffusor:


General data:



Colour temp. [K]	CRI	Lifetime [h]	Warranty [Years]	MacAdam [SDCM]	Weight [kg]
3000	Ra > 80	50.000	5	4	9,20
4000	Ra > 80	50.000	5	4	9,20



Index no.	Lumen output [lm]	Power [W]	Colour temp. [K]	CRI	Lifetime [h]	Warranty [Years]	MacAdam [SDCM]	Weight [kg]
497111000/730	11000	81	3000	Ra > 70	50.000	5	4	12,00
497111000/740	11000	81	4000	Ra > 70	50.000	5	4	12,00
497111000/757	11000	81	5700	Ra > 70	50.000	5	4	12,00
497114500/730	14500	107	3000	Ra > 70	50.000	5	4	12,00
497114500/740	14500	107	4000	Ra > 70	50.000	5	4	12,00
497114500/757	14500	107	5700	Ra > 70	50.000	5	4	12,00
497117200/730	17200	132	3000	Ra > 70	50.000	5	4	12,00
497117200/740	17200	132	4000	Ra > 70	50.000	5	4	12,00
497117200/757	17200	132	5700	Ra > 70	50.000	5	4	12,00




adu RAL Code after index number)


LED module:	Osram or Tridonic LED module included
Colour temperature:	3000K or 4000K
Colour Rendering Index (CRI)	>80 in standard
Driver:	Electronic integrated driver
Emergency unit:	N/A
Movement sensor:	N/A
Daylight control sensor:	N/A
Operating temperature range:	- 20°C ... +40°C
IP Class:	IP65
Power:	220-240V 50/60Hz
Lighting direction:	Direct lighting
Reflector type:	N/A
Light distribution:	Symmetric in standard, asymmetric on request
Diffusor:	Mat glass, other on request
General data:	5 Years standard warranty
	All other technical features such as : Luminaire Efficacy, LOR, Lumen maintenance L/B etc. available in our pricelist
	Wattage of products may vary due to constant LED efficacy improvements. Luminous flux & Luminaire Power tolerance +/- 10%.
	System power consumption (LED module & driver) depends on components used



Colour temp. [K]	CRI	Lifetime [H]	Warranty [Years]	MacAdam [SDCM]	Weight [kg]
3000K	Ra > 80	50.000	5	3	5,00
4000K	Ra > 80	50.000	5	3	5,00

Index no.	Lumen output [lm]	Power [W]	Colour temp. [K]	CRI	Lifetime [H]	Warranty [Years]	MacAdam [SDCM]	Weight [kg]
4554:10000/730	10000	72	3000 K	Ra > 70	50.000	5	4	8,00
4554:10000/740	10000	72	4000 K	Ra > 70	50.000	5	4	8,00
4554:10000/757	10000	72	5700 K	Ra > 70	50.000	5	4	8,00



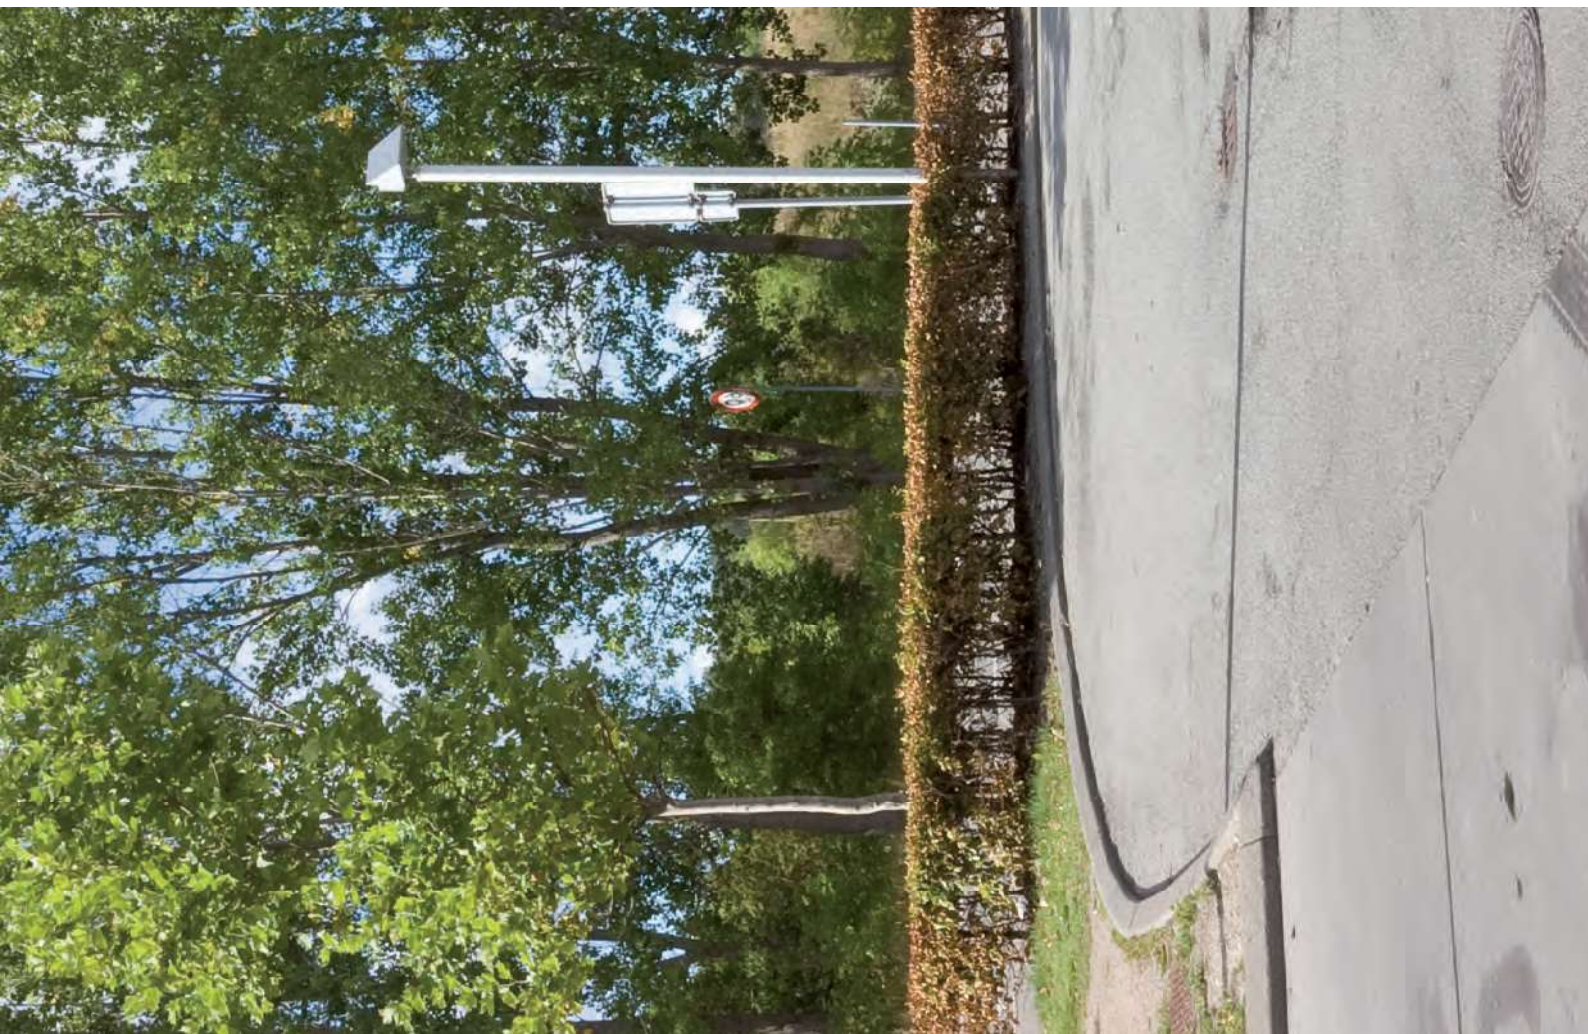

LED module:
Philips E27 retrofit LED bulb

Colour temperature:
2700K

Colour Rendering Index (CRI)
>80 in standard

Driver:
N/A

Emergency unit:
N/A

Movement sensor:
N/A

Daylight control sensor:
N/A

Operating temperature range:
- 20°C... +40°C

IP Class:
IP65

Power:
220-240V 50/60Hz

Lighting direction:
Direct lighting

Reflector type:
N/A

Light distribution:
Symmetric


Diffusor:
Clear glass, other on request

General data:
3 Years standard warranty

All other technical features such as : Luminaire Efficacy LOR, Lumen maintenance L/B etc. available in our pricelist


Wattage of products may vary due to constant LED efficacy improvements. Luminous flux & Luminaire Power tolerance +/- 10%.

System power consumption (LED module & driver) depends on components used

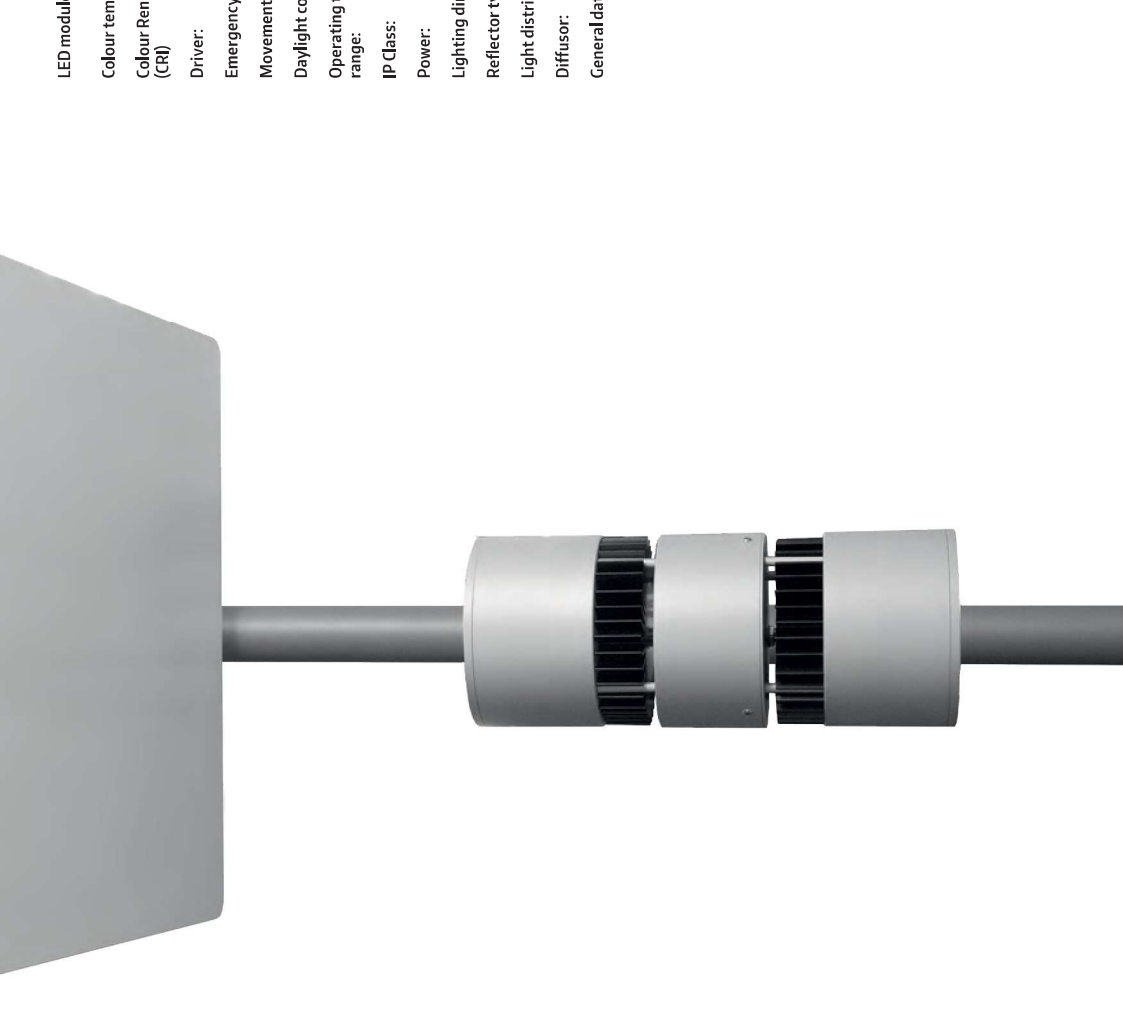

Colour temp. [K]	CRI	Lifetime [h]	Warranty [Years]	MacAdam [SDCM]	Weight [kg]
------------------	-----	--------------	------------------	----------------	-------------

2700	Ra > 80	50.000	5	4	9,00
------	---------	--------	---	---	------



Index no.	Lumen output [lm]	Power [W]	Colour temp. [K]	CRI	Lifetime [h]	Warranty [Years]	MacAdam [SDCM]	Weight [kg]
-----------	-------------------	-----------	------------------	-----	--------------	------------------	----------------	-------------

6020.2200/830	2200	20	3000	Ra > 80	50.000	5	3	25,00
---------------	------	----	------	---------	--------	---	---	-------

6020.2200/840	2200	20	4000	Ra > 80	50.000	5	3	25,00
---------------	------	----	------	---------	--------	---	---	-------

6020.4000/830	4000	36	3000	Ra > 80	50.000	5	3	25,00
---------------	------	----	------	---------	--------	---	---	-------

6020.4000/840	4000	36	4000	Ra > 80	50.000	5	3	25,00
---------------	------	----	------	---------	--------	---	---	-------

6020.6000/830	6000	54	3000	Ra > 80	50.000	5	3	25,00
---------------	------	----	------	---------	--------	---	---	-------

6020.6000/840	6000	54	4000	Ra > 80	50.000	5	3	25,00
---------------	------	----	------	---------	--------	---	---	-------

