


PAVO A 237

- Kardanische LED-Aufbauleuchte 2 x 40° schwenkbar
- Philips Chip Fortimo SLM Gen.7
- Material Aluminiumdruckguss, Zylinder aus Stahlblech
- Pulverbeschichtet in weiß, schwarz, silber sowie RAL auf Anfrage
- Reflektoren aus 99,9 % Reinaluminium wahlweise 14, 24, 36 oder 60°
- Bajonettfrontring mit klarem Schutzglas für werkzeuglosen Reflektorwechsel, das Schutzglas schützt Chip und Reflektor vor Verunreinigungen
- Passive Kühlung
- Inkl. Standardtreiber, dimmbare Treiber auf Anfrage
- Gewicht: 3,30 kg



- Gimballed built-up LED-luminaire, 2 x 40°
- Philips Chip Fortimo SLM Gen.7
- Material diecast-aluminium, cylinder out of steel
- Powderpainted in white, black, silver as well as RAL upon demand
- Reflectors out of pure aluminium 99,9 % optionally 14, 24, 36 or 60°
- Twist & look frontring for change of glass & reflectors without any tools, the clear glass protects chip & reflector from dust & dirt
- Passive cooling
- Incl. standard driver, dimmable version upon demand
- Weight: 3,30 kg

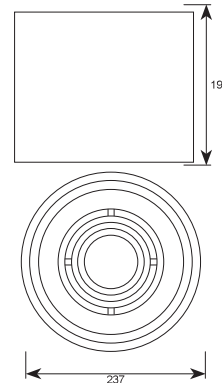

CE IP 20
220 - 240 V
50 - 60 Hz



RAL 9006
silber/
silver



RAL 9005
schwarz/
black



RAL 9016
weiß/
white

Fortimo SLM Gen.7 LES 19mm 11,2-41,7 W

830	3.000 K	RA 80	1.990 - 5.870 Lumen
835	3.500 K	RA 80	1.910 - 5.880 Lumen
840	4.000 K	RA 80	2.130 - 6.620 Lumen
927	2.700 K	RA 90	1.630 - 5.060 Lumen
930	3.000 K	RA 90	1.710 - 5.300 Lumen
935	3.500 K	RA 90	1.780 - 5.530 Lumen
940	4.000 K	RA 90	1.840 - 5.710 Lumen

Fortimo SLM Gen.7 FOOD LES 19mm 11,2-41,7 W WARM WHITE

925	2.700 K	RA 90	1.130 - 3.460 Lumen
-----	---------	-------	---------------------

Fortimo SLM Gen.7 FOOD LES 19mm 11,2-41,7 W PREMIUM RED

930	2.900 K	RA 87	1.180 - 3.610 Lumen
-----	---------	-------	---------------------





1259

14°	1259-_-14
24°	1259-_-24
36°	1259-_-36
60°	1259-_-60

PAVO A 150

- LED-Aufbauleuchte 2 x 15° schwenkbar
- Philips Chip Fortimo SLM Gen.7
- Material Aluminium
- Pulverbeschichtet in weiß, schwarz, silber sowie RAL auf Anfrage
- Reflektoren aus 99,9 % Reinaluminium wahlweise 14, 24, 36 oder 60°
- Bajonettfrontring mit klarem Schutzglas für werkzeuglosen Reflektorwechsel, das Schutzglas schützt Chip und Reflektor vor Verunreinigungen
- Passive Kühlung
- Inkl. Standardtreiber, dimmbare Treiber auf Anfrage
- Gewicht: 2,50 kg



- Built-up LED-luminaire, 2 x 15° adjustable
- Philips Chip Fortimo SLM Gen.7
- Material aluminium
- Powderpainted in white, black, silver as well as RAL upon demand
- Reflectors out of pure aluminium 99,9 % optionally 14, 24, 36 or 60°
- Twist & look frontring for change of glass & reflectors without any tools, the clear glass protects chip & reflector from dust & dirt
- Passive cooling
- Incl. standard driver, dimmable version upon demand
- Weight: 2,50 kg



CE IP 20
220 - 240 V
50 - 60 Hz



1
RAL 9006
silber/
silver



2
RAL 9005
schwarz/
black



3
RAL 9016
weiß/
white

Fortimo SLM Gen.7 LES 19mm 11,2-41,7 W

830	3.000 K	RA 80	1.990 - 5.870 Lumen
835	3.500 K	RA 80	1.910 - 5.880 Lumen
840	4.000 K	RA 80	2.130 - 6.620 Lumen
927	2.700 K	RA 90	1.630 - 5.060 Lumen
930	3.000 K	RA 90	1.710 - 5.300 Lumen
935	3.500 K	RA 90	1.780 - 5.530 Lumen
940	4.000 K	RA 90	1.840 - 5.710 Lumen

Fortimo SLM Gen.7 FOOD LES 19mm 11,2-41,7 W WARM WHITE

925	2.700 K	RA 90	1.130 - 3.460 Lumen
-----	---------	-------	---------------------

Fortimo SLM Gen.7 FOOD LES 19mm 11,2-41,7 W PREMIUM RED

930	2.900 K	RA 87	1.180 - 3.610 Lumen
-----	---------	-------	---------------------



1279

14° 1279-_-14

24° 1279-_-24

36° 1279-_-36

60° 1279-_-60